

**CONTRACT NO: 09-205-220036**

**EXCAVATOR PILING**

**PROJECT DESCRIPTION**

**PROJECT NAME:** Cedar Mtn.

**PROJECT NUMBER:** 22-036-704-09

**SUPERVISORY AREA:** Mica

**PROJECT LOCATION:**

This project area is four miles southeast of Athol, Idaho. Access is by State Highway 95, gravel road and dirt roads.

Legal Description:

Unit	Subdivision	Acres	Section	Township	Range
1	Pts. SE, Pts SW	175	36	53N	3W

**TREATMENT TYPE:**

The project area will have large component of fuel loading reduced by excavator piling over 175 acres. The project area was harvested in CY 07 and 08, and a submerchantable slashing over project acreage will be accomplished in Spring 09.

**CONTRACT PERIOD:**

Contract work may commence after the contractor has received a signed copy of the contract and has had a pre-work conference with the Contract Supervisor, but **may not start before August 1, 2009**, unless approved by the Contract Supervisor. All contract work shall be completed by October 15, 2009. The contract will terminate on October 20, 2009.

**CONTRACT PAYMENT:**

Payment will be made on the basis of satisfactory completion of the contract requirements on the below listed payment unit and per the Master Contract. Payment to be made at the rate(s) set forth in schedule A attached hereto.

<u>Payment Unit</u>	<u>Units</u>	<u>Acres</u>
1	1	175

**HAZARD PLAN:**

Piled slash will be burned by Idaho Department of Lands personnel, thereby eliminating the fire hazard.

**SUBJECT TO DIRECTION AND INSTRUCTION OF THE CONTRACT SUPERVISOR,  
THE CONTRACTOR WILL BE REQUIRED TO ADHERE TO THE FOLLOWING:**

**SPECIAL PROVISIONS:**

1. Slash and woody debris shall be excavator piled as directed by the Contract Supervisor. All piles shall be located in such a manner as not to damage residual leave trees from piling or subsequent burning.
2. Slash shall be piled in such a way that they are free of dirt, stumps, or other non-combustible debris. Piles shall be constructed in a manner so that debris is piled tall and compact.
3. No piling of debris or ground based equipment within the Stream Protection Zone (SPZ) (30 feet on a class II and 75 feet on a class I), of any stream, within 30 feet of any wet area, or within 20 feet of any conifer or wildlife tree.
4. No slash debris shall be piled outside of the unit boundary.
5. The contractor shall utilize an excavator to accomplish the piling. This excavator shall be equipped with a grapple, a bucket and thumb, or combination, capable of grasping and piling 1 – to – 24 inch material. The skill(s) of the operator and the capability of the excavator shall be able to negotiate, as well as, efficient piling on slopes up to 40% without soil movement. Slopes over 40% shall not be piled or traversed.
6. All roads within and adjacent will be kept free of slash, piled or loose. Any material protruding over the cut banks onto the road right-of-way will be cut away.
7. Piling operations shall not be conducted when conditions are such that excessive soil compaction, erosion, or resource damage will result (as determined by the Contract Supervisor).
8. Contractor shall keep excavator on skid trails whenever possible to minimize soil damage.
9. Damage to road surfaces, culverts, gates, bridges or cross-ditches will be promptly repaired at the contractor's expense.
10. Contractor shall construct additional cross-ditches as directed by the Contract Supervisor.
11. Contractor shall be responsible for maintaining any and all gate closures accessing the contract area. The contractor will furnish a lock to provide access. The contractor will be responsible for any and all damage caused by said gates being left open by the contractor or the contractor's employees, or subcontractors.
12. Excavated or side-hill trails shall not be constructed.

**INSPECTION:**

The contracted work will be field inspected as per the Master Contract.

**FURTHER INFORMATION:**

Further information will be available by contacting the following address:


Idaho Department of Lands  
Mica Supervisory Area  
3706 Industrial Ave. South  
Coeur d'Alene, Idaho 83815

208-769-1577 (phone)  
208-769-1597 (fax)  
[srider@idl.idaho.gov](mailto:srider@idl.idaho.gov) (e-mail)

Contact: Scott Rider

Page Left Blank for Two Sided Printing


Cedar Mtn.  
Contract No. 09-205-220036  
Project No: 22-036-704-09  
Vicinity Map

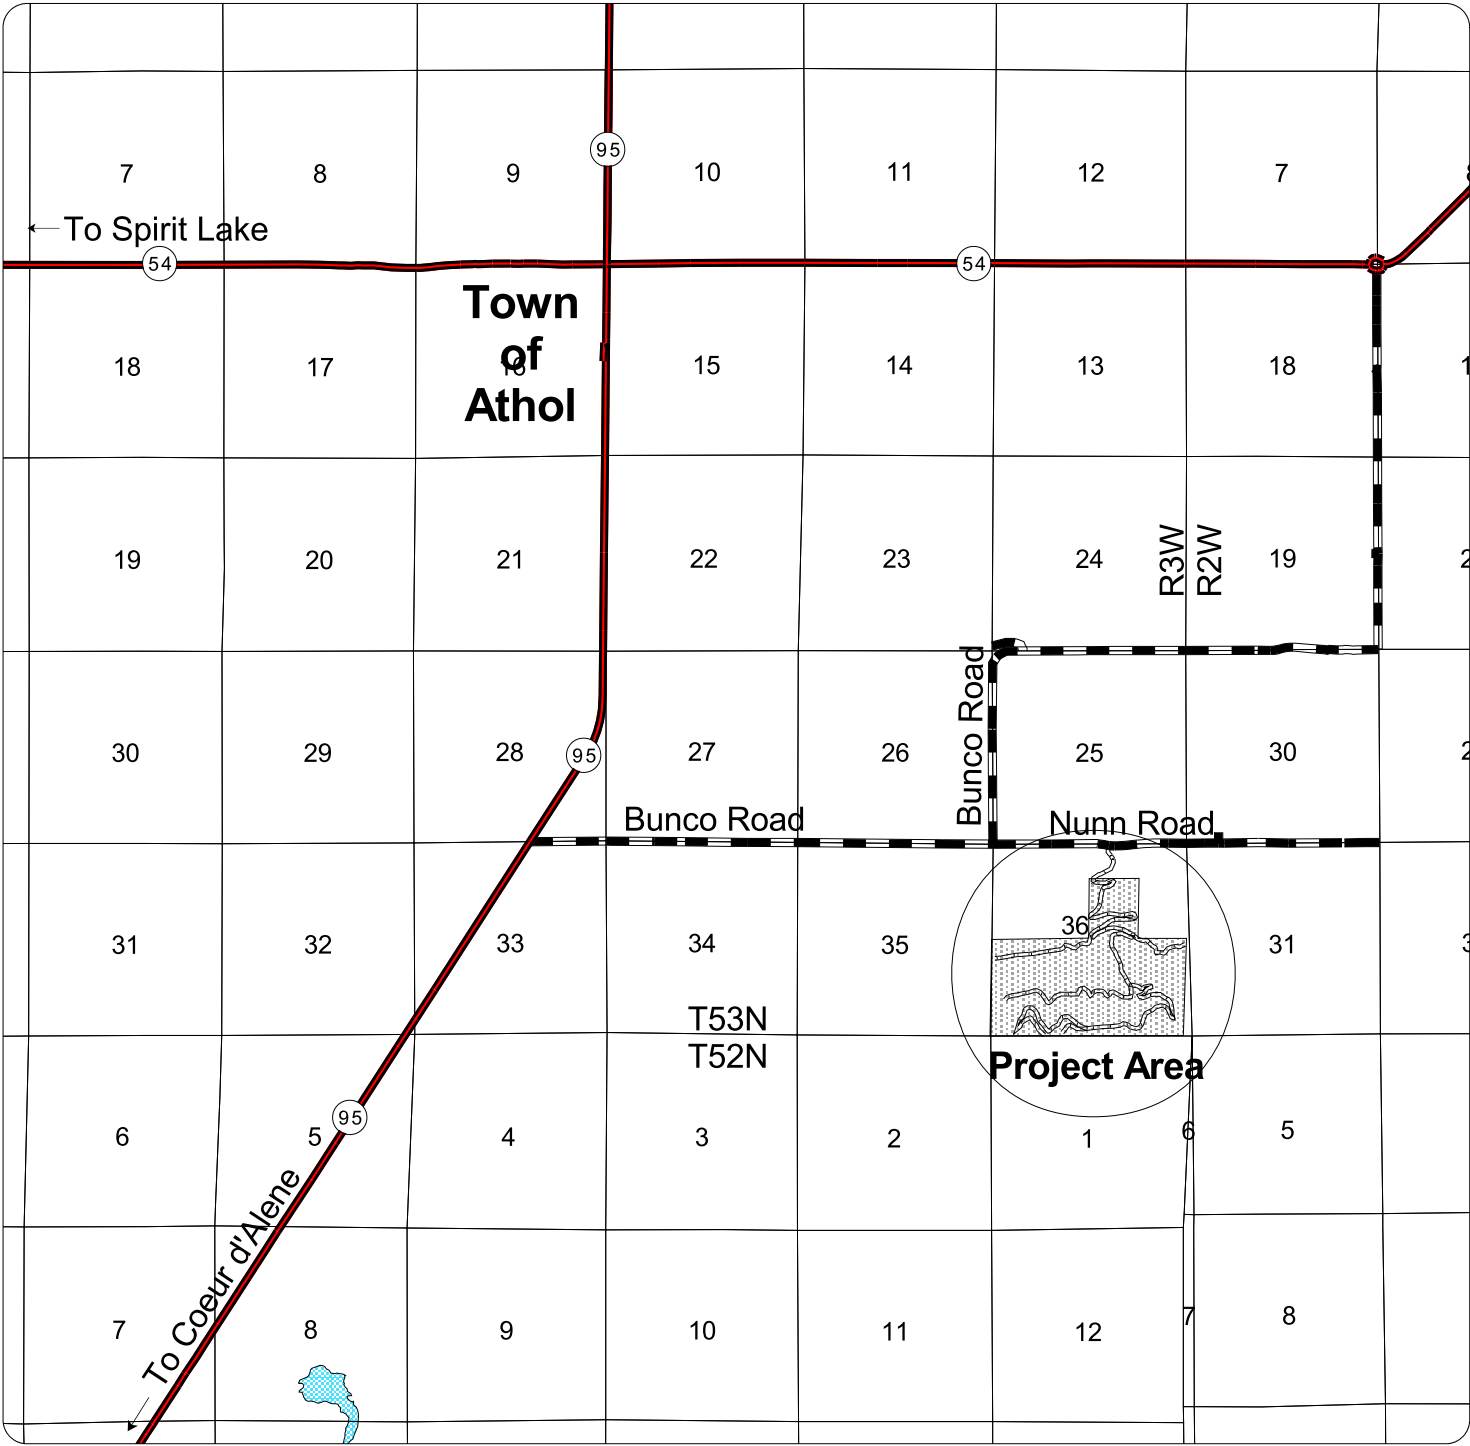


**Legend**

Roads

- Highway
- Paved Road
- Gravel or Improved Dirt Road



Cedar Mtn.  
Contract No: 09-205-220036  
Project No: 22-036-704-09  
Pts. Section 36 T53N R3W

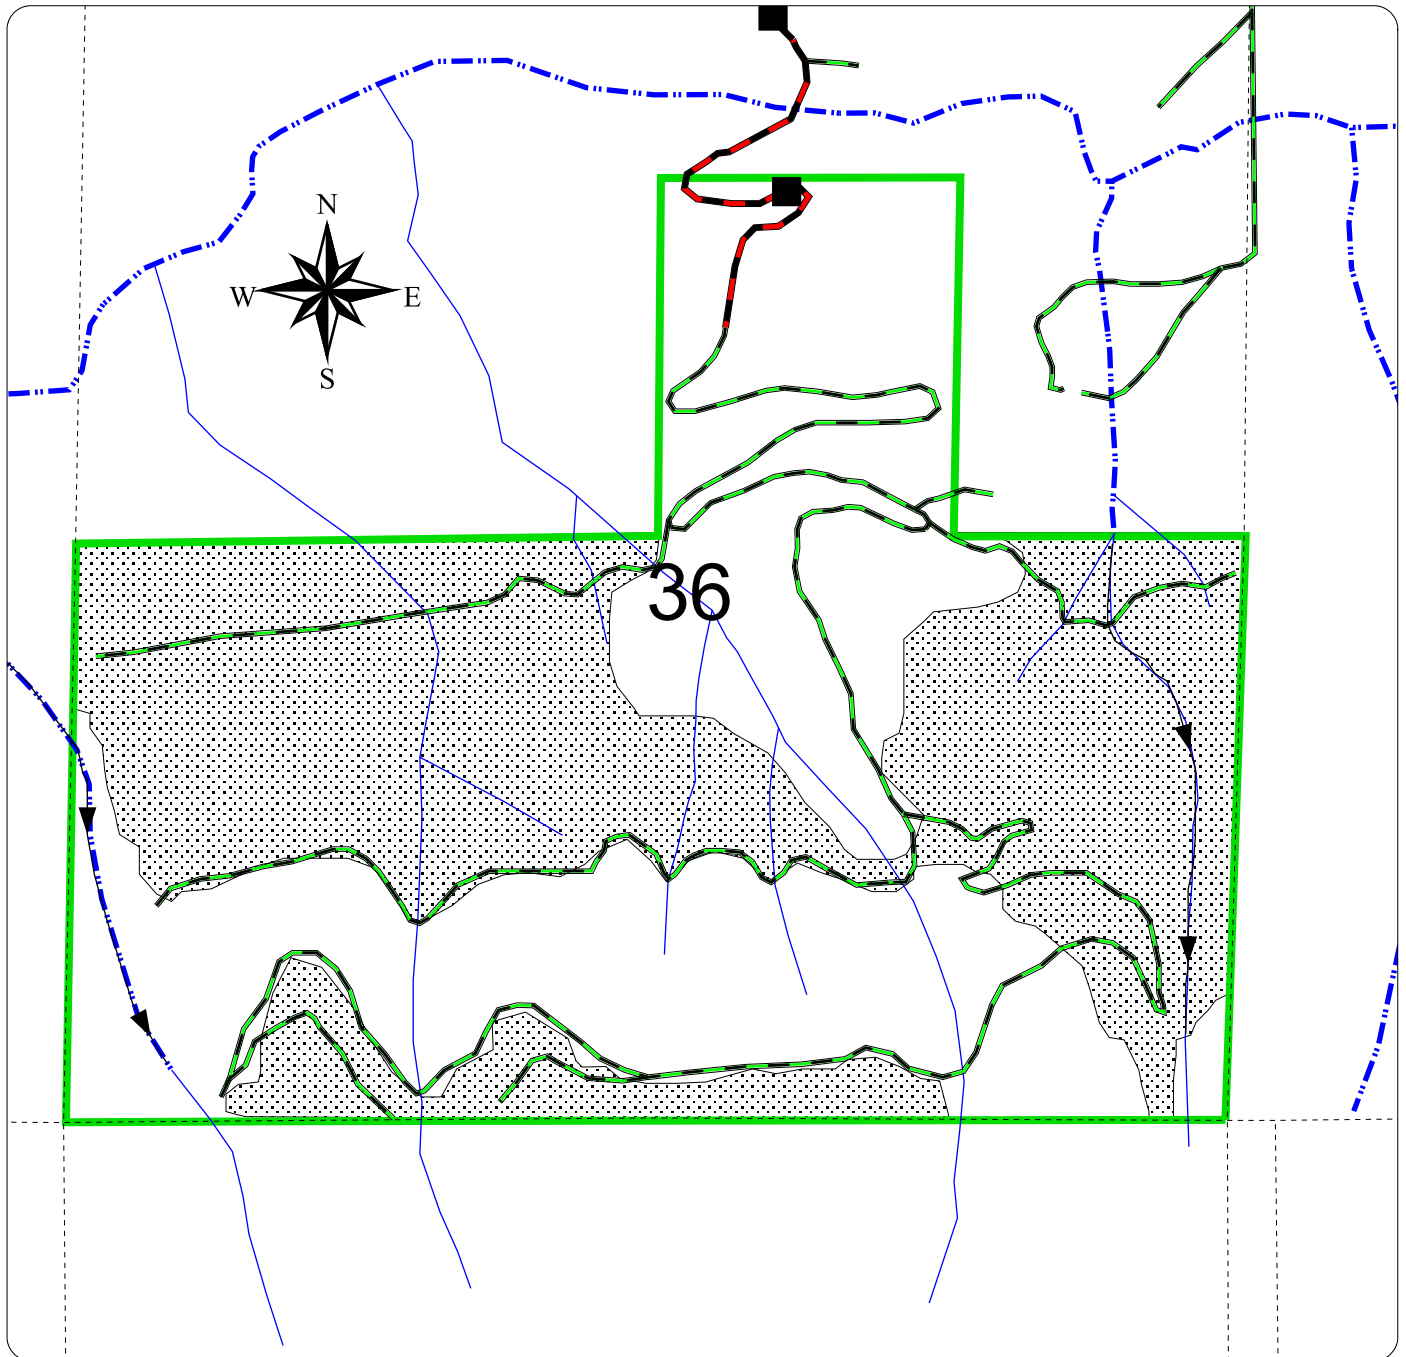

Legend

