



"Solutions to water quality, quantity, permitting & planning issues"

February 9th, 2024

William Haberman
Managing Member
Valiant Idaho II, LLC
151 Clubhouse Way
Sandpoint, ID 83864

IDAHO DEPARTMENT OF LANDS

MAY 13 2024

PEND OREILLE LAKE AREA

SUBJECT: Hydrogeological Interpretation – Trestle Creek Drainage, Idaho
North Trestle Creek Man-made Island Removal Project

Dear Mr. Haberman:

This letter report documents Water & Natural Resource Group Inc. (WNR Group) preliminary interpretation of the hydrogeologic conditions in the lower Trestle Creek drainage to support Valiant Idaho II, LLC (Valiant), in consultation with the Idaho Club, proposed community dock project located north of the outfall of Trestle Creek into Lake Pend Oreille. As part of the community dock project, removal of the previous constructed "island" is proposed to restore the shoreline to its ancestral natural lakebed levels. Specifically, the regulatory agencies have requested an interpretation of the hydrogeologic setting at the site, and the hydraulic continuity to surface water by a licensed professional in order to understand the potential effects, if any, on the surface and groundwater if the proposed project is completed. This letter report includes a summary of readily available information reviewed for the interpretation of the groundwater aquifer at the site and its connection with the surface water.

QUALIFICATIONS OF PERSON CONDUCTING REVIEW

Gene St.Godard is a licensed Geologist in Idaho (PG #862) and a Professional Geologist/Hydrogeologist in Washington (L.Hg. #129). Mr. St.Godard with the WNR Group is also licensed geologist in Oregon (R.G. #1630) and California (R.G. #6247), certified hydrogeologist in California (C.Hg. #593), a Certified Water Right Examiner (CWRE) in Idaho (#134) and CWRE in Washington State (#004). He has a bachelor's degree in Geology from Mansfield University of Pennsylvania and a Master of Science degree in Geology from Eastern Washington University. Mr. St.Godard has over 35 years of professional experience in the northwestern United States conducting geologic, hydrogeologic and surface-groundwater continuity projects. The geologic and hydrogeologic conditions of the site are his professional interpretation and opinion on the groundwater conditions at the Site, at the time of this assessment, based on readily available data.

In May 2004, Mr. St.Godard formed the WNR Group to provide water resource services to clients throughout northern Idaho and eastern Washington and Oregon. The WNR Group has extensive experience in conducting hydrogeologic and hydrologic studies to demonstrate assured sustainable water supplies in accordance with state and federal guidelines. These include basin wide water hydrogeological evaluations and water balances, regional and localized aquifer characteristic studies, conducting hydraulic continuity analyses, and impairment analyses.

INTRODUCTION

The WNR Group was retained to perform a preliminary hydrogeologic review to support a proposed community dock project. The project site is located approximately three (3) miles northwest of the town of Hope, Idaho, near the mouth of Trestle Creek west of Highway 200 at the shoreline of Pend Oreille Lake (Figure 1). Specifically, the site is located within Gov't Lot 5 in the SE¼SE¼ Section 17 and the SW¼SW¼ Section 16, T57N, R01E (Figure 2).

The preliminary hydrogeologic review was conducted in order to provide a professional opinion as to the hydrogeologic setting of groundwater at the existing site of the proposed community dock. This interpretation was based on readily available information, primarily published government documents, driller well logs, geologic maps and data, and known hydrogeologic reports at and in the vicinity of the site. No intrusive field data collection was conducted, including the completion of drilling activities to determine geology and groundwater depth.

The WNR Group reviewed readily available hydrogeologic reports and data in the vicinity of the subject site in an attempt to develop an understanding of the hydrogeologic setting at the subject Site. The WNR Group attempted to identify uses of existing data at and in the immediate vicinity of the Site as recorded in readily available government documents. These sources and findings are summarized in the sections that follow.

Note: It needs to be noted that of the difference in data elevations presented in this report. Government elevation data presented or reproduced in this document is reported as NGVD29 datum in their databases. Whereas, elevation data collected and presented under recent studies is in the NAVD88 datum. NGVD29 is the abbreviation for the National Geodetic Vertical Datum of 1929, the predecessor to NAVD88. Due to the advancement of technology and surveying methods, the increased amount of available data and the level of accuracy of that data led to the new datum. The original datum used 26 tide stations throughout the United States and Canada and recorded changes in tide levels to establish a starting line of 0 ft. elevation to measure and compare heights of buildings, floodplains, mountains, etc. NAVD88 is the abbreviation for the North American Vertical Datum of 1988. NAVD 88 is one of five current National Geodetic Datums, which are coordinate systems that act as standard reference lines to measure points on the earth's surface in the region that they apply. NAVD88 is more accurate while collecting field data in the current time. However, government databases which extend well before 1988, typically still present the data in NGVD29. Where used in this report, the difference at the site is noted and compared. For the area of the site, the USGS uses a correction factor of +3.87 feet (NGVD29 to NAVD88) at their lake level gaging station 12392500 near Hope, Idaho. When interpreting data in this report, the reader should be aware to which datum is being referenced for the measurement.

The proposed action at the site is to construct a new community dock facility. In order to accomplish the project, the proponent needs to excavate soil materials that were placed as an "island" during the initial construction of the boat docks currently at the site. During the initial development phase, the current inlet and embayment was excavated out in order to create more shoreline to place boat docks which paralleled the newly created shoreline. Material excavated out at this time was placed at the site as fill, creating the current configuration of the "island." The proposed project will be to remove this previously placed fill material that created the island and now backfill in the previously excavated sloughs, to allow docks to be placed within the bay. Figure 3 presents the engineering drawings of the current configuration of the sloughs, Figure 4 depicts the proposed actions needed for completion of the project, and Figure 5 an engineering drawing of the proposed completed project. Additional information on the proposed actions can be found within the J.A. Sewell and Associates engineering drawing exhibits submitted for support the US Army Corps of Engineers Joint Permit (December 2023). The proposed action would also realign the North Fork Trestle Creek (NFTC) to return its flow back to Trestle Creek. This action is discussed later in the report.

MAY 13 2024

PHYSIOGRAPHIC SETTING

The project site is in the Lake Pend Oreille subbasin, which is bordered to the west by the Selkirk Mountains, to the north by the Cabinet Mountains, and by the Bitterroot Mountains to the east. The basin was substantially modified by Pleistocene glaciation, and was the site of the ice dam that created the largest catastrophic floods documented in the earth's history (Rain Shadow Research, Inc., 2008). Glacial advances resulted in highly dissected watersheds, depositing glacial sediments (till and outwash) throughout the Lake Pend Oreille tributaries.

Several times during the Pleistocene "Ice Age," vast glaciers originating in Canada advanced into the northern part of the Columbia Plateau, northern Idaho, and Montana. Glacial meltwater streams from northern Washington, along with gigantic floods caused by sudden breakage of ice-dammed lakes in the Selkirk and Rocky Mountains to the northeast of the Columbia Plateau (Glacial Lake Missoula) cut deep channels (coulees) across the Columbia Plateau. Lake Pend Oreille was formed by the Pleistocene glaciation. Lake Pend Oreille is approximately 43 miles long, 1,152 feet deep, and has over 111 miles of shoreline. The lake covers approximately 85,960 acres and is dammed on the Pend Oreille River outlet by Albeni Falls dam just east of Oldtown, Idaho. The site lies along the northeastern shore of Lake Pend Oreille, approximately 3 miles west of Hope, Idaho at the mouth of Trestle Creek.

HYDROGEOLOGIC FRAMEWORK

This section of the report summarizes the geologic and hydrogeologic framework at and in the immediate vicinity of the site. The WNR Group reviewed available data to develop an understanding and interpretation of the lithologic, hydrologic, and hydrogeologic characteristics which compose the groundwater system at the site, and the hydraulic connection to surface water of NFTC and Lake Pend Oreille. Understanding these characteristics is important in developing a conceptual model of hydrogeologic setting at the present time, and inferring conditions after the project is completed.

Surface Topography – WNR Group reviewed available United States Geological Survey (USGS) topographic quadrangle maps for the Site and vicinity to determine the physical setting of the Site. The Site is located within the southwestern area of the Trout Peak, Idaho 7-1/2-minute quadrangle map dated 1996. The Site is located at the mouth of Trestle Creek (Figure 6). The general slope of the Trestle Creek area is to the west-southwest. Trestle Creek sits within a deeply incised tributary valley that has steep bedrock slopes (Figure 6). The valley floor is filled in with glacial and alluvial sediments, with the lower mile of the drainage having a slope of approximately 0.026 ft/ft (approximately 140 ft drop per mile). Trestle Creek drainage is approximately 8-miles long with the headwaters to the northeast on the southeastern slope of Trestle Ridge (USGS(a)).

Geologic Setting - Maps and Reports

The WNR Group reviewed the Idaho Geological Survey geologic map for Idaho interactive map site (2023), the USGS (Miller & others, 1999) Digital Geologic Map of the Sandpoint 1- x 2-Degree Quadrangle, and the Geologic Map of the Trout Peak Quadrangle (Reed and others, 2006). The geologic maps revealed that the Trestle Creek drainage is primarily filled with Quaternary Age glacial till deposits (Qgt) as shown on the regional geologic map (Figure 7). The lower half mile of the drainage and at the subject site is underlain by Quaternary Age unconsolidated alluvial fan deposits (Qaf) as shown on the Trout Peak geologic map (Figure 8). Groundwater is inferred to flow to the west-southwest in the area of the site, mimicking the valley floor.

Regional Geology – This section provides a generalized conceptual review of the geology in the area of the Valiant Idaho II, LLC area. The generalized regional geology of the area is best summarized by Reed and others (2006) as:

IDAHO DEPARTMENT OF LANDS

MAY 13 2024

PEND OREILLE LAKE AREA

“The oldest and most abundant rocks in the Trout Peak quadrangle are low metamorphic grade metasedimentary rocks of the Prichard Formation of the Proterozoic Belt-Purcell Supergroup. These rocks host penecontemporaneous mafic sills. A pluton of Cretaceous age is also present within the Belt Supergroup. Tertiary intrusions occur in both as dikes. The quadrangle was glaciated by the Purcell Trench Lobe of the Cordilleran ice sheet which dammed the Clark Fork drainage south and east of the quadrangle and formed glacial Lake Missoula. Ice filled the Trout Creek basin with ground moraine and crossed divides into the Trestle Creek drainage. Small alpine valley glaciers occupies high cirques in the upper Trestle Creek drainage after the Purcell Lobe retreated about 12,000 years ago.”

The geologic maps revealed that the area of Trestle Creek is underlain by Quaternary Age glacial till (Qgt) and alluvial fan deposits (Qaf). Areas along the shoreline are mapped as Holocene-Pleistocene alluvium and deltaic deposits (Qad) which are representative interbedded alluvium at the mouth of the Pack River and its delta in Pend Oreille Lake deposited prior to the construction of Albeni Falls Dam. The bedrock walls of the Trestle Creek valley consist various Precambrian metamorphic Belt rocks of the Prichard Formation (Ypab, Ypm, Ypd, Ypc) with areas intruded with Middle Proterozoic mafic intrusive rocks (Ymi). Figure 9 presents a regional cross section from the Reed and others (2006) geologic map. As shown on the cross-section Trestle creek is filled in with a thin layer of glacial till overlying the easterly dipping Precambrian Prichard bedrock.

Site Soil and Geologic Conditions – Visual inspection of soils determined that the shallow soils at the Site consist of brown silty sand with varying amounts of clay and gravel, typical of glacio-fluvial and alluvial fan deposits found in area. These sediments appear to be deposited as valley fill during that last period of glaciation. A well was installed at the site in March 2022 and the well log is presented in Figure 10. This well (D0090671) encountered a mixture of clay, silt and gravel (interpreted to be the alluvial fan deposits) to a depth of 20-feet, where wet clay and gravel was encountered from 20 to 40-feet (inferred to be glacial till), overlying a large gravel and coarse sand deposits to the full depths explored of 80 feet (inferred to be ancestral alluvial or flood deposits). Groundwater was first encountered at a depth of 50 feet, with the static water level rising to 15 feet below grade after the well was installed. This is indicative of a saturated aquifer that is under confined to semi-confined conditions.

A second older well is also located on the site, approximately 150 feet northwest of the new well. No well log or construction details were found for this well. Table 1 presents the GPS measurements collected on the two wells located at the project site.

Table 1: Information on wells located at the project site

Source Name	Well Tag	Township	Range	Section	QQ Q	Latitude	Longitude
New Well	D0090671	57N	01E	16	SWSW	48.28325	-116.35153
Old Well	No tag	57N	01E	16	SWSW	48.28360	-116.35190

Groundwater Conditions – Groundwater in the Trestle Creek drainage consists of two aquifer systems. These comprise a shallow unconfined to semi-confined unconsolidated sediment aquifer that is bounded on all sides by the bedrock. Yields from these saturated silt, sand and gravel sediments can be 10's to 100's of gallons per minute (gpm), and are highly dependent upon the silt and clay content which can decrease the permeability of the soil. Water recharging these aquifers would primarily be from precipitation, snow pack, and bedrock fracture springs in the headwaters of the drainage. Water availability in the shallow unconsolidated aquifer may vary dependent upon weather and precipitation patterns. The nature and extent of the shallow unconsolidated valley fill aquifers is highly variable, with some areas containing confined to semi-confined aquifer conditions due to overlying lacustrine silt and clay sediments or clay rich till deposits. Recharge to these aquifers is primarily in the form of precipitation infiltration, surface water infiltration, and recharge from deeper bedrock aquifers.

The second groundwater system is within the fractures within the Precambrian argillite and siltites bedrock. The bedrock fractures can vary in size and yield. Yields from these bedrock fractures are typically low, less than 10 gpm. Groundwater yields within the granite bedrock can vary dependent upon the thickness of the fractures, numbers of fractures screened through, precipitates in the fractures, well screen, and dependent on well construction (well efficiency). Water in the bedrock fractures are typically under some hydraulic head and may have an upward migration that recharge the valley fill aquifers, and/or emanate at the ground surface as springs.

IDWR Water Well Logs - An Internet search of the Idaho Department of Water Resources water well database was conducted. A GIS search criterion of ½-mile radius from the property was entered, as shown in Figure 11 and 12. Thirty-one (31) groundwater wells were identified within the ½-mile search radius of the site within the IDWR database. Two wells were located on the valley walls and founded within the fractured bedrock. The remaining 29 well logs were within the unconsolidated aquifer (one well within the database was the new well recently installed at the site).

The well logs reviewed for this analysis are presented in Table 2. The well logs were reviewed for geology and groundwater conditions. These wells generally intercepted two hydrogeologic systems: 1) a shallow unconsolidated unconfined aquifer system located within the valley fill sediments in the incised valley of Trestle Creek, and 2) a fractured basement bedrock aquifer which is located within the valley walls and the bedrock beneath the unconsolidated aquifer. This hydrogeologic unit is the basement rock which is present at an elevation above that of the surrounding regional unconsolidated aquifer. Well logs reviewed for this analysis are attached to this report.

The sand & gravel valley aquifer system is the main water supply directly associated with this project site. Groundwater yields within the sand and gravel aquifer can vary dependent upon amount of silt and clay in the matrix, well screen length, and dependent on well construction (well efficiency). Generally, in the area northwest of the site, it appears that the sand and gravel with some cobble/boulder aquifer has sustained yields ranging from 15 to 100+ gpm, well above the required needs of a domestic well. Review of well logs in the immediate area of the site indicates that the groundwater directly below the site is hosted within the Rathdrum Prairie aquifer system.

One well (D0090671) identified in the search is located in the eastern portion of the site. This well was completed to a depth of 80 feet below grade. The well log encountered a mixture of clay, silt and gravel to a depth of 20-feet, where wet clay and gravel was encountered from 20 to 40-feet overlying a large gravel and coarse sand deposits to the full depths explored of 80. Groundwater was first encountered at a depth of 50 feet, with the static water level rising to 15 feet below grade after the well was installed. This is indicative of a saturated aquifer that is under confined to semi-confined conditions.

Groundwater in the sand and gravel aquifer in the area of the site is recorded at depths of approximately 10 to 30 feet below grade, dependent upon topographical elevation of the well head. Data reviewed is representative that the Trestle Creek valley fill aquifer is bounded by bedrock in the drainage. Groundwater depths in the wells are generally shallow throughout the drainage and appear to be within 10 to 20 feet of the ground level. The groundwater flows down the drainage in a southwesterly direction towards the project site, where it discharges to the hydrologic system of Lake Pend Oreille.

IDAHO DEPARTMENT OF LANDS

MAY 13 2024

PEND OREILLE LAKE AREA

Table 2: Summary of Well Log Information

Well ID	Permit ID	Metal Tag Number	Owner	Township	Range	QQ	Qtr	Sect.	Production (gpm)	Static Water (FT)	Casing Depth (FT)	Total Depth (FT)	Construction Date	Casing Diam (in.)	Aquifer Type
270784	756704		HARVEY KOHNER	57N	01E	NE	SW	16	15	20	26	26	4/9/1980	6	Gravel
414166	843991	D0051273	PEND OREILLE BONNER DVLP LLC	57N	01E	NE	SW	16	0	18	7	39	12/6/2006	6	Sand & Gravel
414167	843992	D0051274	PEND OREILLE BONNER DVLP LLC	57N	01E	NE	SW	16	0	17	9	39	12/10/2006	6	Sand & Gravel
414168	843993	D0051275	PEND OREILLE BONNER DVLP LLC	57N	01E	NE	SW	16	0	14	10	39	12/12/2006	6	Sand & Gravel
272314	755106		FRED BURNSIDE	57N	01E	NW	SW	16	5	18	32	34	12/9/1969	6	Sand & Gravel
414615	844447	D0046379	BILL TRUBY	57N	01E	SE	SW	16	30	10	58	58	12/15/2006	6	Sand
268538	758349		CHARLOTTE TURNER	57N	01E	SE	SW	16	60	17	59	60	3/17/1992	6	Gravel
269956	757442		BILL FREEMAN	57N	01E	SE	SW	16	50	24	62	72	8/21/1986	6	Sand & Gravel
270339	756933		DENNIS MC DANIEL	57N	01E	SE	SW	16	10	15	77	77	10/13/1982	6	Gravel
270339	756614		NORM ROSENBERGER	57N	01E	SE	SW	16	15	20	50	50	10/3/1980	6	Sand & Gravel
271695	755271		JIM BOSSINGHAM	57N	01E	SE	SW	16	5	20	42	60	9/28/1971	6	Decom. Granite
388892	815724	D0033864	BILL TRUBY	57N	01E	SE	SW	16	30	10	58	58	6/23/2004	6	Gravel/Boulders
388893	817725	D0033865	BILL TRUBY	57N	01E	SE	SW	16	30	10	58	58	6/23/2004	6	Gravel/Boulders
390069	825437	D0035550	BILL TRUBY	57N	01E	SE	SW	16	12	-1	40	220	10/21/2004	6	Shale
268919	757954	D0090671	Valiant Idaho Club	57N	01E	SW	SW	16	180	15	70	80	3/9/2022	8	Sand & Gravel
271845	755421		ROGER BEST	57N	01E	SW	SW	16	30	15	30	35	3/20/1990	8	Sand & Gravel
401133	830531	D0039942	AL SYLVESTER	57N	01E	SW	SW	16	20	20	40	40	3/1/1973	6	Pea Gravel
			CRAIG HATHFIELD	57N	01E	SW	SE	16	7	160	322	322	3/9/2005	6	Shale
271846	755422		DON WENZEL	57N	01E	Gvt-1		21	15	25	52	52	2/25/1973	6	Pea Gravel
271847	755423		JEB C BEST	57N	01E	Gvt-1		21	20	16	31	31	2/26/1973	6	Sand & Gravel
271848	755424		JEB C BEST	57N	01E	Gvt-1		21	20	15	30	30	2/27/1973	6	Sand
271849	755425		WALTER RUBERG	57N	01E	Gvt-1		21	15	25	58	58	2/24/1973	6	Pea Gravel
269700	757187		TIM MC DANIELS	57N	01E	NE	NW	21	30	25	44	43	8/1/1984	6	Sand & Gravel
271424	755781		FRED DARK	57N	01E	NE	NW	21	15	30	54	54	12/23/1975	6	Sand
271498	755855		RAY MC GINNIS	57N	01E	NE	NW	21	20	20	40	40	4/27/1976	6	Sand & Gravel
272316	755108		FRED DARK	57N	01E	NE	NW	21	20	25	56	56	10/15/1969	6	Coarse Sand
272320	755112		GORDON MEAD	57N	01E	NE	NW	21	10	20	54	54	10/10/1969	6	Sand
412230	841974	D0045026	DOLORES POOLMAN	57N	01E	NE	NW	21	30	20	55	60	9/7/2006	6	Pea Gravel
270147	756851		ELIZABETH MC MILLAN	57N	01E	NW	NW	21	50	25	58	60	4/4/1982	6	Gravel
453840	888703	D0079525	VALIANT IDAHO LLC	57N	01E	NW	NW	21	150	10	72	77	8/16/2019	6	Sand/Gnl/Cobble

TD = Total Depth of well exploration in feet

SWL = Static Water Level below ground surface in feet at time of drilling

AF = Artesian Flow; bgs = below ground surface

Shaded data is from well at/nearest to the subject site.

Source Aquifer is documented from well drillers log and their interpretation of the geology

Site Groundwater Conditions

The site groundwater conditions immediately east of the lake are controlled by the geologic conditions within the alluvial fan deposits at the mouth of Trestle Creek. Interpretations are based on the observations of the new well installed by Valiant located approximately 200 feet east of the ordinary high water mark where the proposed community boat dock project is located. As state above, the recent well completed along the access road to the site encountered a mixture of clay, silt and gravel to a depth of 20-feet, where wet clay and gravel was encountered from 20 to 40-feet overlying a large gravel and coarse sand deposits to the full depths explored of 80. The first saturated soil was not encountered until approximately 50 feet below the ground level.

At the time of drilling, on March 8, 2022 groundwater was first encountered in the soils at a depth of 50 feet below ground surface. This is interpreted to be the upper saturated thickness of the aquifer, and is estimated to be at an approximate elevation of 2027 feet (NAVD88). However, after installation of the well, the aquifer pressure in the semi-confined raised the level to a noted depth of 15 feet below ground level. This corresponds to an approximate static water level elevation of 2062 feet (NAVD88). At the time of drilling, the lake was recorded at an elevation of 2055.67 feet (NAVD88), or approximately 6.33 feet lower in elevation than the static water level in the new well. Table 3 summarizes data from the new groundwater well and its relationship to Lake Pend Oreille Lake levels. Data from March 9, 2022 was from installation of the well, March 29, 2022 from the pump test conducted on well, and November 30, 2023, from a site visit WNR Group conducted at the site.

Table 3: Information on Water Level Elevations in Site Well & Lake Pend Oreille

DATE	Lake Pend Oreille		New GW Well			GW-SW Elev. Diff.
	Elev (ft) - NGVD29	Elev. (ft) NAVD88	Depth to GW (ft-bgs)	Elev (ft) - NGVD29	Elev. (ft) NAVD88	
March 9, 2022	2051.80	2055.67	15.00	2058.13	2062.00	6.33
March 29, 2022	2051.45	2055.32	16.00	2057.13	2061.00	5.68
Nov 30, 2023	2051.41	2055.28	17.75	2055.38	2059.25	3.97

Note: Ground Elevation at New Well = ~2077 ft (NAVD88) / ~2073.13 ft (NGVD29); Casing stickup = +2.1 ft

Lake Pend Oreille summer level Elevation = ~2066.37 ft (NAVD88) / ~2062.5 ft (NGVD29)

Lake Pend Oreille Flood Stage Elevation = ~2067.37 ft (NAVD88) / ~2063.5 ft (NGVD29)

Lake Pend Oreille high winter level Elevation = ~2058.87 ft (NAVD88) / ~2055.0 ft (NGVD29)

Lake Pend Oreille low winter level Elevation = ~2054.87 ft (NAVD88) / ~2051.0 ft (NGVD29)

A second well measurement event occurred on November 30, 2023. During this site visit, the depth to groundwater was measured at 19.85 feet below the top of casing, equivalent to 17.75 feet bgs (the casing has 2.1 feet of stick-up above ground level). This corresponds to an approximate static water level elevation of 2059.25 feet (NAVD88). On November 30, 2023, the lake was recorded at an elevation of 2055.28 feet (NAVD88), or approximately 3.97 feet lower in elevation than the static water level in the new well.


These recordings document that the static water level in the groundwater well, which is approximately 200 feet east of the shoreline/high water mark of the lake, is higher than the lake level elevation. This would confirm that groundwater flow is towards the lake. The difference in elevation varied from 6.33 feet in March 2022 to 3.97 feet in November 2023. The higher difference in March would support that the groundwater is at its higher elevation during the spring runoff, and in November at its lowest elevation when it is after the domestic high water use period and recharge to the aquifer is at its lowest. It should be noted that the lake level is approximately the same elevation which shows the groundwater change is

MAY 13 2024

resulting in a lower gradient, which would correspond to a lower velocity and recharge of groundwater to the lake.

The aquifer characteristic were evaluated during a pump test on the new well on March 29, 2022 (Sewell, 2022), approximately 20 days after installation and development of the well. This evaluation was conducted to test the well (identified as “new well” in this report) for a potential future water source for residential use. The well was pumped at a constant rate of 60 gpm for eight hours. After the initiation of pumping, the water level in the well dropped immediately 3.2 feet below the static water level of 16 feet recorded at the start of the test. This is indicative of a confined to semi-confined aquifer, that would drop quickly as the pressure in the aquifer is immediately reduced from the initiation of pumping. After 3 minutes of pumping, the water level decreased another 0.1 feet, then dropped another 0.1 feet 120 minutes into the test where it remained at that level through the length of the 8.5 hour (510 minute) pump test. Total drawdown of the 60 gpm constant rate test was 3.4 feet. After the cessation of pumping, the water level recovered to its static water conditions within two minutes. Graph 1 presents the data collected during this constant rate pump test on the New Well (Sewell, 2022).

Graph 1: Graph of water level data from 8.5 hour pump test conducted on New Well (Sewell, 2022)

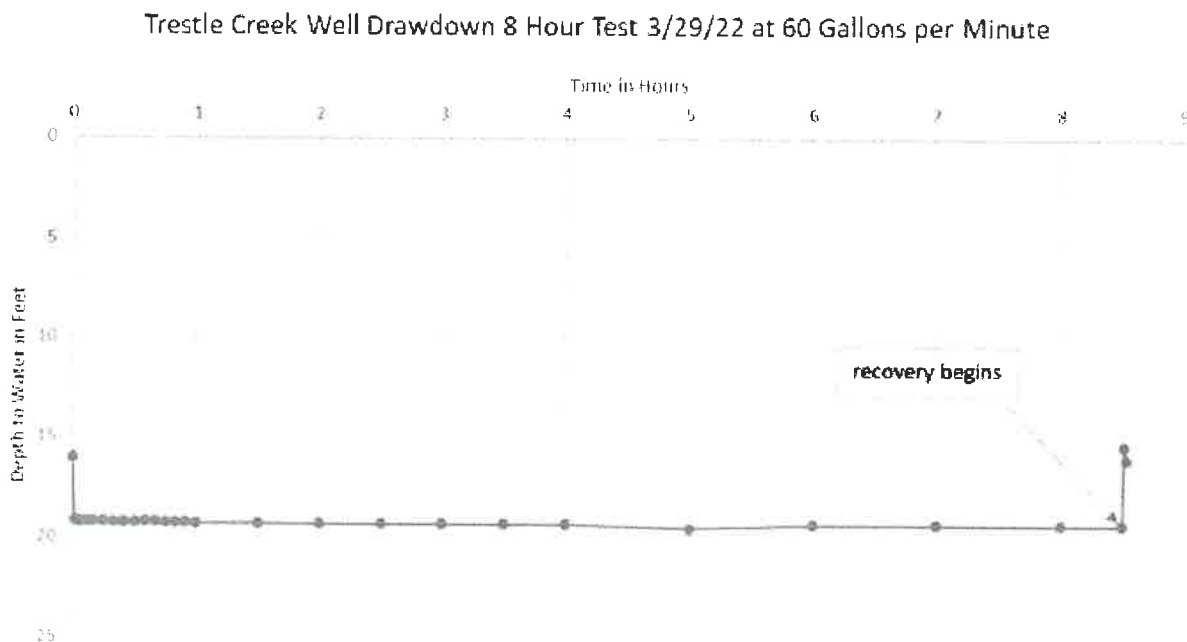

During the pump test, Sewell also monitored the “old well” located approximately 150 feet northwest of the pumping well. No drawdown was observed in the well during this test. Although Sewell concluded that the pump test radius of influence did not reach this well, this conclusion can not be verified without knowing the well construction details, specifically what depth and soil formation the well is screened through. A well log on the “old well” could not be found for this review.

The pump test does confirm the hydrogeologic interpretations of the well log that the saturated groundwater interval is within a confined to semi-confined aquifer, located at depth below the lake level. This would lead us to conclude that the groundwater is not “directly” discharge to the lake below the shoreline of the proposed project, but is being conveyed through a confined interval below the low water mark of the lake at the project. The groundwater eventually directly recharges to the lake off-shore of the

project area where it would migrate back into the lake water column through a more porous facies change medium, or where the overlying clay layer at the site is absent.

Lake Pend Oreille Setting

Lake Pend Oreille is thought to have formed in an older river valley that was controlled by faults. Recent studies have determined that most of the lake substrate consists mainly of silt, sand, gravel, cobble, bedrock debris, some boulders, and some bedrock outcrops (Barton and others, 2013). Unconsolidated sediments in the substrate originated from glaciation, megafloods, lacustrine, and terrestrial and subaqueous landslide processes, and from tributary inflows into the lake. Bedrock surrounding most of the lake is comprised of Precambrian Belt Supergroup metasedimentary formations, which form steep slopes that can frequently have landslides and rock slides that fall into the lake (Barton and others, 2013). Lake Pend Oreille was scoured by multiple advances and retreat of the Cordilleran Ice Sheet which advanced into the Purcell Trench, scoured by the ice age floods, and then subsequently filled with glacial outwash and flood deposits. The lake is now dammed at the south end by thick glacial and flood deposits that underlie Farragut State Park, which formed an undisturbed end moraine.

The shoreline morphology is subdivided into the variable zone and the subvariable zone. The variable zone is where lakebed elevations are between normal maximum summer full pool and normal minimum winter low pool. Subvariable zone is where lakebed elevations are lower than the lake's normal minimum winter low pool elevation.

Major tributaries to the lake include the Clark Fork and Pack River, in addition to many smaller stream/creek tributary valleys such as Trestle Creek. The outfall of the lake is through the Pend Oreille River which is controlled by Albeni Dam near the Idaho/Washington state border.

Lake Pend Oreille is a regulated lake that maintains winter and summer levels. The lake is typically held at the summer level of 2062 – 2062.5 feet (NGVD29) by the end of June or early July, and is held at that level until the 3rd Sunday of September, when water is drained from the lake. The winter level is either maintained at 2051 feet or 2055 feet (NGVD29), depending a decision made by Idaho Fish and Game Commission for kokanee spawning. Graph 2 shows the measured lake level at the USGS station 12392500 located near Hope, Idaho for water year 2022 and Graph 3 for water year 2023 (USGS, 2023). As shown on the graph, the lake level begins to rise in March-April and reaches near full pool by July. The summer level is maintained for approximately three months before the elevation is allowed to drop for the winter management period.

At the project site, groundwater and surface water from the Trestle Creek drainage directly discharge to Lake Pend Oreille. At the bottom/mouth of the Trestle Creek drainage, the groundwater is in hydraulic continuity with the lake and will rise and fall dependent upon lake levels. However, this aquifer connection may be out in the lake due to the confining levels observed at the site and discussed previously in this report.


Shoreline characteristics just northwest of the site is documented in the Rain Shadow Research Inc. (2008) report. In summary, the shoreline characteristics near the site consist of sandy and gravelly deposits, with the larger clasts eroded from the alluvial fan, which contains debris from glacial till and angular and subangular clasts certainly eroded from the Prichard Formation (Lewis et al, 2006). The excavations completed for this study revealed soil profiles of reworked sand and gravel over poorly sorted, extremely gravelly deposits that are either reworked channel gravels or reworked gravels from the Trestle Creek alluvial fan. Clayey and pebbly glacial till deposits underlie the reworked gravels at the study site. The exposed sides of the existing boat dock sloughs at the site were dug through extremely gravelly and cobbly sandy loam alluvial fan deposits.

IDAHO DEPARTMENT OF LANDS

MAY 13 2024


PEND OREILLE LAKE AREA

Graph 2: Pend Oreille Lake elevations for WY 2022 (USGS, 2024)

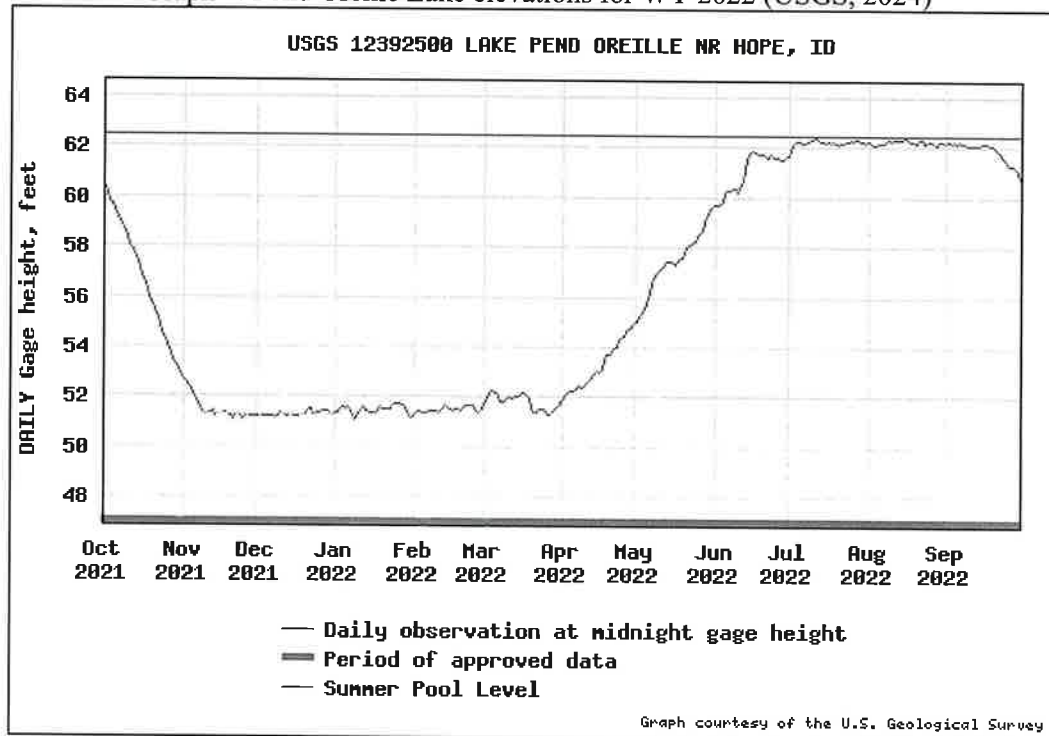

*Note: Data levels presented by USGS is in NGVD29. For NAVD88 add 3.87 feet.
Daily gage height is value + 2000 feet.*

Graph 3: Pend Oreille Lake elevations for WY 2023 (USGS, 2024)

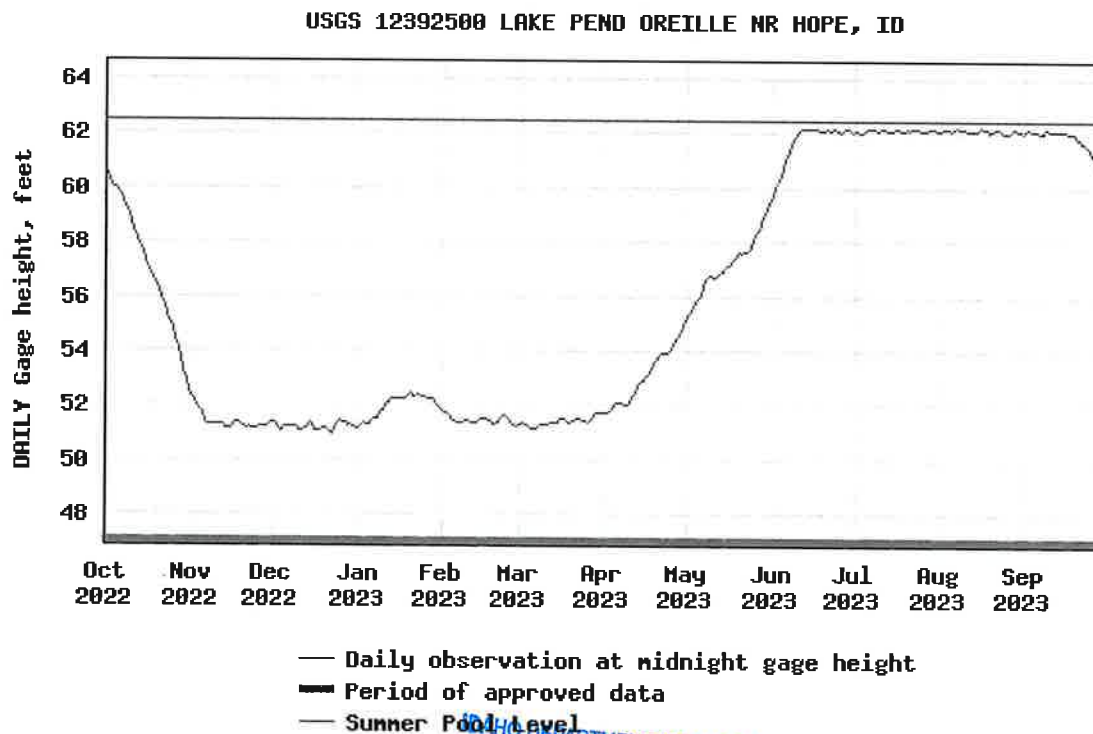

*Note: Data levels presented by USGS is in NGVD29. For NAVD88 add 3.87 feet.
Daily gage height is value + 2000 feet.*

PENDING DEPARTMENT OF LANDS
MAY 13 2024
PEND OREILLE LAKE AREA

The shoreline around the “island” which is proposed to be excavated is comprised of the old excavation spoils that originally dug the sloughs where the boat docks were located. Our visual observations during the October 10, 2023 site visit, documented that the “island” is approximately 10 to 12 feet above the existing lake bed level, and consist of a mixture of silt, sand and gravel fill material. Photos 1 and 2 shown site conditions at the “island” during our October 2023 site visit. As shown in the photos, the proposed excavation phase of the project will be conducted during the winter low water levels, and no excavation will be conducted into the groundwater table. Any groundwater beneath the island footprint is directly connected to the lake level and waters of the lake and do not appear to be directly connected to the groundwater observed in the wells in the area east of the shoreline.



Photo 1: Looking NE across slough mouth to Lake Pend Oreille. “Island” consists of silts, sands, and cobbles. Water in slough drainage is rain water runoff flowing towards lake water to the left.



Photo 2: Looking North across slough to “Island”. Fill material consists of silts, sands, and cobbles. Water in slough drainage is rain water runoff flowing towards lake water to the left.

IDAHO DEPARTMENT OF LANDS

MAY 13 2024

PEND OREILLE LAKE AREA

Stream Morphology

The stream morphology of the lower Trestle Creek area is best described in the River Design Group (RDG) report dated August 2023. This report presents the restoration plan for improving aquatic habitat and fish passage on the NFTC. This segment of the creek is interpreted to have been artificially constructed as an irrigation canal in the 1900's (RDG, 2023). It currently bifurcates from Trestle Creek approximately ½-mile upstream from the NFTC discharge point into the lake. The start of NFTC is located in the NW¼SW¼SE ¼ Section 16, T57N, R01E (see Figure 13). The proposed restoration design will reactivate the historical confluence of NFTC and Trestle Creek and enhance the stream corridor habitat conditions for fish and the vegetated flood plain.

Trestle Creek: Trestle Creek flows within a deeply incised tributary valley that has steep bedrock slopes (Figure 6). The valley floor is filled in with glacial and alluvial sediments, bounded on the valley walls with Precambrian metasedimentary rocks of the Prichard Formation. Trestle Creek is approximately 8-miles long with the headwaters to the northeast on the southeastern slope of Trestle Ridge (USGS(a)). Water within the creek is derived from precipitation, snow melt, and from groundwater springs in the headwaters of the drainage. No detailed flow measurements were reviewed for this study. The creek discharges directly to Lake Pend Oreille south of the project site near the boat ramp. Photo 3 is a view of Trestle Creek looking downstream approximately 1/8-mile upstream of its outlet into the lake. Photo 4 is a view of the outlet/mouth of Trestle Creek into Lake Pend Oreille at the low lake water level.

Trestle Creek appears to be hydraulically connected to the coarser valley fill in the headwaters to about one mile upstream of its outlet to the lake. Through this reach of the creek, the valley is fairly steep and the creek is inferred to be gaining water from the shallow aquifer in the unconsolidated valley fill sediments. In the lower one mile of the creek, the gradient appears to become lower, as it begins to flow over the alluvial fan deposits identified on the geologic maps. Well logs also appear to show a shallow clay dominant layer upon which the creek may be perched and separated from the Trestle Creek valley aquifer.



Photo 3: Photo of Trestle Creek looking northwest to its outlet into Lake Pend Oreille.

MAY 13 2024



Photo 4: Photo of Trestle Creek looking southwest to its outlet into Lake Pend Oreille.

North Fork Trestle Creek (NFTC): NFTC bifurcates from Trestle Creek approximately ½-mile upstream from the NFTC discharge point into the lake. NFTC was constructed as an artificial channel/diversion canal in the early to middle 1900's (RDG, 2023) and there is no control structure at the inlet. NFTC experiences fluctuating flow levels commensurate with flows of Trestle Creek. The channel typically experiences peak flow discharge during the spring in response to rain-on-snow events and snow melt during the spring rain events. Within the area east of the project, NFTC transitions from an entrenched, confined system with small step pools downstream of the Montana Link railroad crossing to a moderately entrenched, riffle dominated channel in the downstream reach near the confluence with Lake Pend Oreille (RDG, 2023). The NFTC maintains a relatively straight alignment throughout its reach. Photo 5 presents a photo of the NFTC approximately 200 feet upstream of its outlet into the lake slough. From our observations, it appears the NFTC is perched on top of a more clayey soil through its lower reach.

Currently, NFTC's outfall is into the old slough which was excavated during the initial construction of the boat dock area (Figure 13). Right before entering the slough, the NFTC is conveyed through a culvert, which is perched above the lake level. Outfall from the culvert is onto some large boulder rip-rap along the slough boundary. Photo 6 is taken looking to the south at the outfall into the slough. The proposed restoration project will abandon this outfall and realign the creek so it flows directly to Trestle Creek. Project realignment and drawings for this restoration project is provided in the RDG 2023 report. Once this restoration is completed, the NFTC will not have influence on, or be influenced by, the proposed community dock project.

IDAHO DEPARTMENT OF LANDS

MAY 13 2024

PEND OREILLE LAKE AREA



Photo 5: Photo of NFTC on 11/10/2022 upstream of the project site.



Photo 6: Picture of the outlet of NFTC into the old slough immediately downstream of culvert.

IDAHO DEPARTMENT OF LANDS

MAY 13 2024

PEND OREILLE LAKE AREA

GROUNDWATER-SURFACE WATER HYDRAULIC CONTINUITY

In a more regional sense, all groundwater and surface water is hydraulically connected, just at varying degrees. For this site, the WNR Group looked at all available data reviewed and discussed previously to develop an understanding of the extent of hydraulic continuity between Trestle Creek, NFTC and the groundwater aquifer in the Trestle Creek drainage.

In order to develop an understanding of the extent of hydraulic continuity in the area, the WNR Group used available data, especially well logs, and developed two cross-sections for the area. Traverse location of the cross sections developed are shown on Figure 13. Groundwater levels depicted on the cross-sections were those recorded by the driller at the time of drilling. Lithologic soils of the unconsolidated sediments were classified into three main groups:

- 1) Soils which are primarily comprised of Clay and have some minor components of sand and gravel (*shown in blue color on the cross-sections*). These are the least permeable soils reviewed in the well logs.
- 2) Soils which are primarily comprised of Sand with varying amounts of gravels and/or boulders (*shown in yellow on the cross-section*). These are porous and permeable soils reviewed in the well logs.
- 3) Soils that are primarily comprised a Gravel, Cobbles and Boulders with minor amounts of silt and sand (*shown in gray color on the cross-sections*). These are the most porous and permeable soils reviewed in the well logs.

Cross-section A was constructed east-west along the linear direction of the Trestle Creek drainage. Figure 14 presents the conceptual hydrogeologic interpretation in the lower two-mile portion of the drainage. As shown on the cross-section, Trestle Creek drainage soils become coarser grained as you traverse up the drainage, with more clay dominated deposited near the lake. These can be interpreted as fine-grained overbank deposits from Trestle Creek deposited over the older alluvial fan deposits. With the finer grained soils in the lower portions of the valley fill sediments, this would reduce groundwater flow rates to the lake within this zone. However, coarser material is present at depth, in which the groundwater would preferentially flow through the coarser higher permeable sediments.

Trestle Creek traverses up to 8 miles within the steeply incised channel. Water in the creek is primarily derived from precipitation, snow melt, and groundwater seeps in the headwaters of the drainage. In the upper portion of the drainage (right side of Figure 14), the creek flows above a porous and permeable gravel and boulder sediment. Through these reaches, the creek is in hydraulic continuity with the shallow unconfined groundwater. As the creek flows down valley, immediately downstream of the bifurcation of NFTC, the creek flows above a clay dominant soil (till) which is less permeable and porous. This soil grades down valley to a clay with less gravel. The aquifer appears to transition to a semi-confined to confined aquifer, as the water is forced into the more porous soils beneath the clay dominant soils. The creek is perched on top of the clay and not in hydraulic continuity with the underlying aquifer. This stratigraphic setting is continued westerly to the mouth of the drainage, where it appears the semi-confined aquifer is located at depth below the lake level. These conditions were confirmed in 1) the drilling of the new well as saturated soil was observed at 50 foot depth, but static water level in the well raised to 15 feet bgs, and 2) the pump test on the new well had an immediate drawdown in the water level indicative of a confined aquifer setting. It appears the confined aquifer continues out beneath the lake, where at some location the groundwater would discharge to the lake where the overlying confining clay soils are not present.

Figure 15 presents a cross-section across the lower portion of the Trestle Creek valley, immediate east of the site. As shown on this cross-section, the groundwater in the aquifer is in the confined sands and gravels below the clay dominated soils. This clay rich soil extends across the width of the valley.

Although NFTC appears to flow directly on top of the clay, Trestle Creek appears to flow on top of some alluvial fill gravels located above the clay dominated (glacial till) soil deposits.

The hydraulic connection at the immediate location of the island does not appear to be affected or in hydraulic continuity with the aquifer, or the creeks east of the island. Any “groundwater” beneath the footprint of the island would be in direct hydraulic connection with the lake water. As such, if any water is encountered, it would be a reflection of the lake level, and not the aquifer of the Trestle Creek drainage. Due to the fact that the creeks enter the lake east of the island, creeks flows will not have an impact on or be impacted from, any “groundwater” observed within the footprint of the island.

IMPACTS OF ISLAND EXCAVATION

As referenced earlier, the plan for the project site is to develop a new proposed community dock project located north of the outfall of Trestle Creek into Lake Pend Oreille. As part of the community dock project, removal of the previous constructed “island” is proposed to restore the shoreline to its ancestral natural lakebed levels. This “island” was created during the initial excavation of the sloughs which hosted the existing docks. Specific information directly related to the “island” footprint is described in the Intermountain Resources (IMR) document dated 2008:

The site had extensive dredging to create the existing configuration of the boat basin back channels and also to divert the North Branch of Trestle Creek to the basin. It appears this was done to route water through the narrow back channel basins in an attempt to reduce the tendency of back channels to become stagnant. There was also regular maintenance dredging performed at the north end of the basin to clear the circulation outlet of the back basin, though it appears to have been generally unsuccessful.

It is also stated in the document that the exact date of construction of the island is not known, but is thought to be done in the decade following the completion of Albeni Falls Dam, which was in 1955.

The excavation of the “island” under this proposed project will be below the high water line. However, excavation will occur during the time when the lake is at winter pool levels. No excavation of materials at the “island” site will occur below the winter pool levels. As a result of the hydrogeology discussed previously, any water encountered within the footprint of the “island” is not interpreted to be hydraulically connected to the Trestle Creek aquifer, but is a reflection of the lake water system. Therefore, if the lake level is located below the bottom of the proposed excavation level, no infringement into the lake hydrologic system will occur.

CONCLUSIONS

The WNR Group has performed a preliminary hydrogeologic review to determine the hydraulic connection of surface and groundwater in the lower Trestle Creek drainage. Specifically, the study was conducted in order to assist the regulatory agencies with understanding the hydrologic regime in the immediate area of the proposed project, and to assist with determining if the proposed project, specifically the excavation of the “island,” will have any impact on the surface and groundwater.

Review of data suggests that the hydrogeologic conditions at the site is a valley fill aquifer which is unconfined in the headwaters and then transitions to confined conditions in the lower portions of the valley. At these locations, the Trestle Creek and NFTC surface water appears to be perched above a clay interval which separates the surface water from the groundwater. The surface water of Trestle Creek and NFTC discharges directly to the lake waters of Lake Pend Oreille, and does not traverse the “island.” Groundwater at the lower part of the valley is under confined conditions, of which the aquifer interval (that layer which is conveying water) flows beneath the shoreline at the lake and the “island.” It is inferred that the groundwater will discharge into the lake somewhere off shore where the confining clay

layer is absent. Water directly below the footprint of the “island” is a projection of lake water, and as such would not affect the lower confined aquifer.

In our opinion, the project (excavation of the island and subsequent fill of the sloughs) will have no effect on surface or groundwater in the area of the site.

LIMITING CONDITIONS

This limited hydrogeologic letter report has been prepared for the exclusive use of Valiant Idaho II, LLC and their assigns, in accordance with the standards of the environmental consulting industry at the time the services were performed. This work has been performed for the sole purpose of assisting in the interpretation of groundwater aquifer conditions for siting of a future municipal supply production well. This letter report is governed by the specific scope of work authorized for the WNR Group and is not intended to be relied upon by any other party unless specified by Valiant Idaho II, LLC. The findings presented herein are based upon readily available government information reviewed as of the date the assessment was performed and review of a limited number of readily available hydrogeologic documents for the area near the Site. Geologic and hydrogeologic data is limited for the subject area and interpretations were made for the conclusions presented in this report. The findings and conclusions presented herein should not be assumed to be an accurate representation of present-day conditions, but only interpretations based on professional judgment. This assessment only presents a professional opinion as to what type of aquifer may be encountered beneath the Site and does not warranty any quantities of water which may be withdrawn. No other warranty is presented within, or implied.

We appreciate the opportunity to be of service to Valiant Idaho II, LLC in providing our interpretation of groundwater conditions at the Site. Should you have any questions regarding this letter report, please do not hesitate to call us at your earliest convenience.

Very truly yours,
Water & Natural Resource Group, Inc.



Eugene N.J. St. Godard, R.G., L.Hg.
Principal Hydrogeologist/Owner
WNR Group, Inc.



Signed: February 9th, 2024

IDAHO DEPARTMENT OF LANDS

MAY 13 2024

PEND OREILLE LAKE AREA

BIBLIOGRAPHY

(Reports cited in document and/or used to develop conclusions)

Barton, Gary J., US Geological Survey, and Dux, Andrew M., Idaho Department of Fish and Game, 2013. Bathymetry, Morphology, and Lakebed Geologic Characteristics of Potential Kokanee Salmon Spawning Habitat in Lake Pend Oreille, Bayview and Lakeview Quadrangles, 1 plate.

Bond, John G., 1978, Geologic Map of Idaho, Idaho Department of Lands, Bureau of Mines and Geology.

Driscoll, Fletcher G., 1986, Groundwater and Wells, Johnson Filtration Systems, Inc., St. Paul, Minnesota, p. 1021.

Drost, B.W. and Seitz, H.R., 1978, Spokane Valley-Rathdrum Prairie aquifer, Washington and Idaho. U.S. Geological Survey Open-File Report 77-829, 79 p. plus 10 plates.

Freeze, R.A. and J.A. Cherry, 1979. *Groundwater*, Prentice Hall, Englewood Cliffs, New Jersey, 604p.

Harrison, Harrison E., Kleinkope, M. Dean, and Obradovich, John D., 1972. Tectonic Events at the Intersection Between the Hope Fault and the Purcell Trench, Northern Idaho, Geological Survey Professional Paper 719, 30 p.

Heath, R.C., 1983. Basic ground-water hydrology, U.S. Geological Survey Water-Supply Paper 2220, 86p.

Idaho Department of Water Resources, December 2023: Internet search of groundwater well log database, <https://idwr.idaho.gov/Apps/appsWell/WCInfoSearchExternal/>.

Idaho Geological Survey, January 2024, Interactive Geologic Map web site: <https://www.idahogeology.org/>.

Intermountain Resources, October 3, 2008. Addenda to Water Quality Management Plan: Excavation and Dredging Protocol. Prepared for Pend Oreille Bonner Development, LLC, 13 p.

Lewis, Reed S., Breckenridge, Roy M., McFaddean, Mark D., and Burmester, Russell F., 2006. Geologic Map of the Trout Peak Quadrangle, Bonner County, Idaho, 1 plate.

Miller, Fred K., Burmester, Russell F., Miller, David M., Powell, Rober E., and Derkey, Pamela D., 1999. Digital Geologic map of the Sandpoint 1- by 2-Degree Quadrangle, Washington, Idaho and Montana. United States Geological Survey Open File Report 99-144, 74 p., 1 plate.

Rain Shadow Research Inc., April 2008. Test Excavation of Site 10BR1092, Bonner County, Idaho, Project Report 182, 28 p.

River Design Group (RDG), August 2023. Design Report – Trestle Creek Restoration Project. Report prepared for Valiant Idaho II, LLC, 29 p.

Sewell and Associates, LLC, June 24, 2022. The Idaho Club – North Planned Unit Development - Well Completion Report, 34 p.

Sewell and Associates, LLC, December 6, 2023a. Engineering drawings related to Idaho Club North Lake P.U.D. (DA Number: NWW-2007-01218). Prepared for Valiant Idaho II, LLC, 16 Drawings.

IDAHO DEPARTMENT OF LANDS
MAY 13 2024
PEND OREILLE LAKE AREA

Sewell and Associates, LLC, December 6, 2023b. Engineering drawings related to Idaho Club North Lake P.U.D. – Marina Grading Plans (Proj. No. 22043-20-001). Prepared for Valiant Idaho II, LLC, 5 Drawings.

Theis, 1935, Solution for a Recovery Test in a Confined Aquifer.

Todd, D.K., 1980. *Groundwater Hydrology*, 2nd ed., John Wiley & Sons, New York, 535p.

United States Geological Survey, 1996(a): Trestle Peak, Idaho 7-1/2-minute Topographical Map.


United States Geological Survey, 1996(b): Trout Peak, Idaho 7-1/2-minute Topographical Map.

United States Geological Survey, January 2024: Internet search of Pend Oreille Lake level database at USGS station 12392500, https://waterdata.usgs.gov/nwis/dv?referred_module=sw&site_no=12392500.

IDAHO DEPARTMENT OF LANDS

MAY 13 2024

PEND OREILLE LAKE AREA

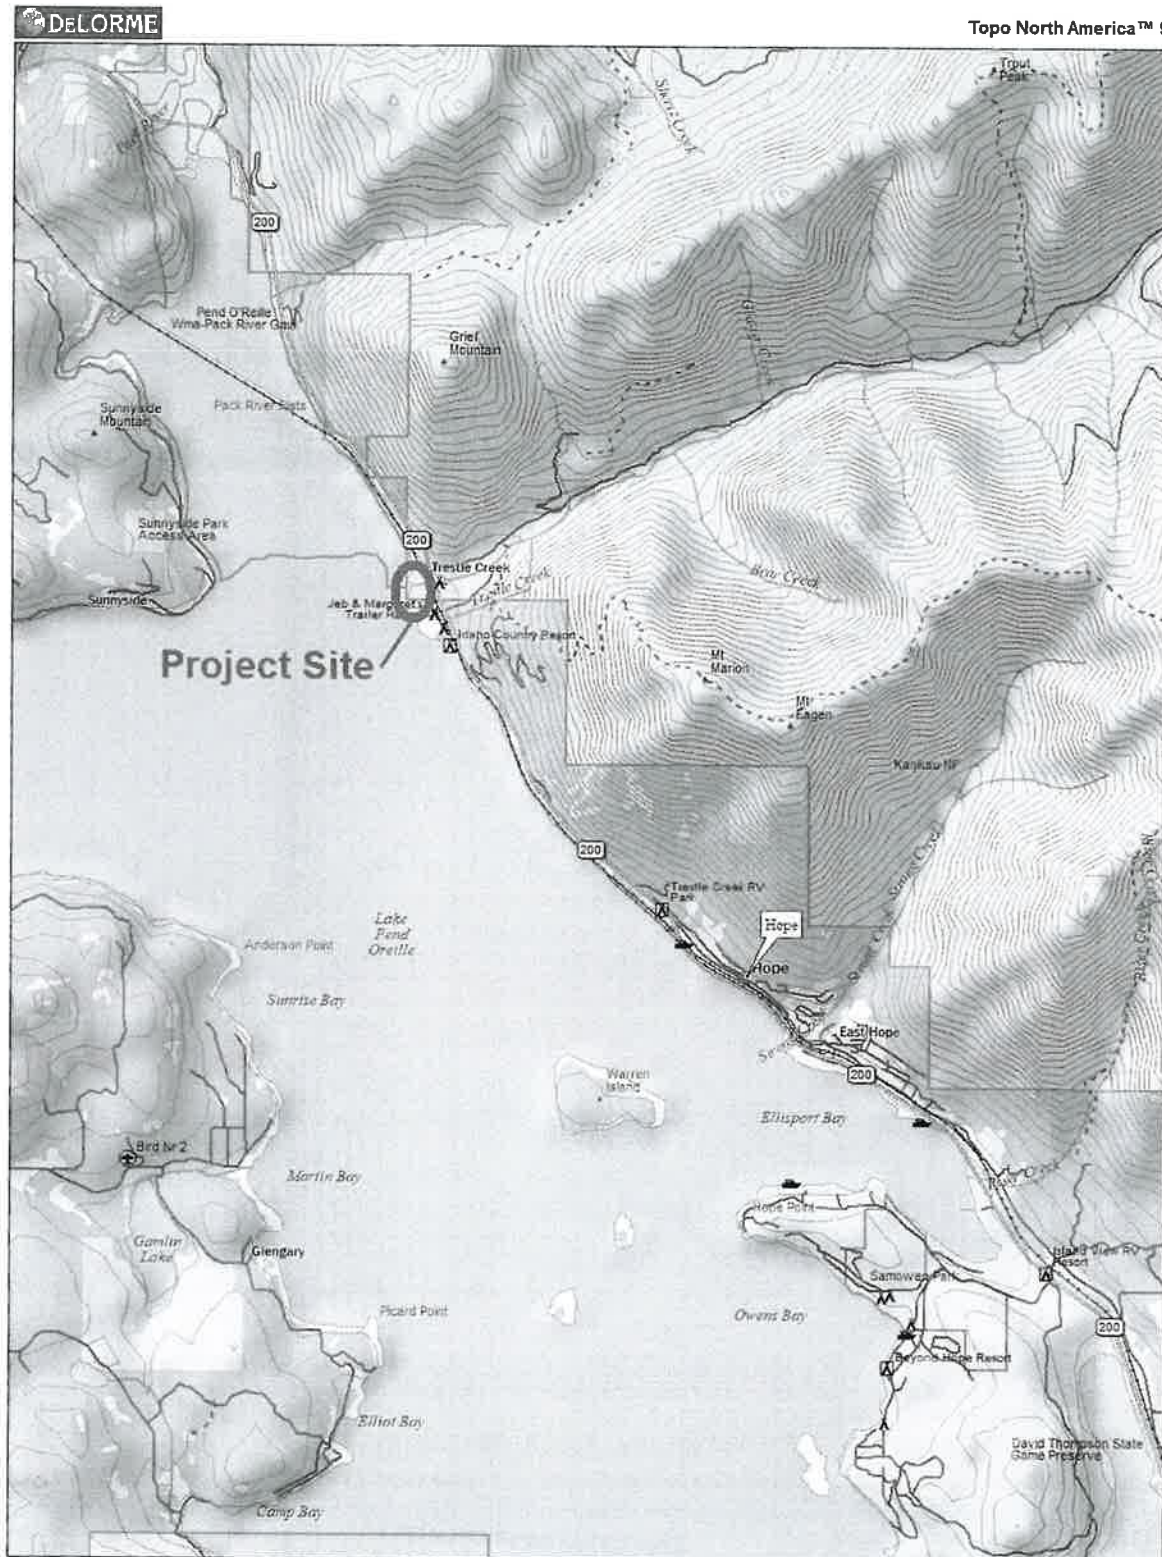

Data use subject to license.

© DeLorme. Topo North America™ 9.

www.delorme.com

IDAHO DEPARTMENT OF LANDS
MN (13.0° E)

MAY 13 2024
Figure 1: Site Vicinity Map

PEND OREILLE LAKE AREA

0 1/4 1/2 3/4 1 1 1/4 1 1/2 1 3/4 mi
Data Zoom 11-6



Figure 2: Site Location Aerial Map.
IDAHO DEPARTMENT OF LANDS

MAY 13 2024

PEND OREILLE LAKE AREA

February 9th, 2024

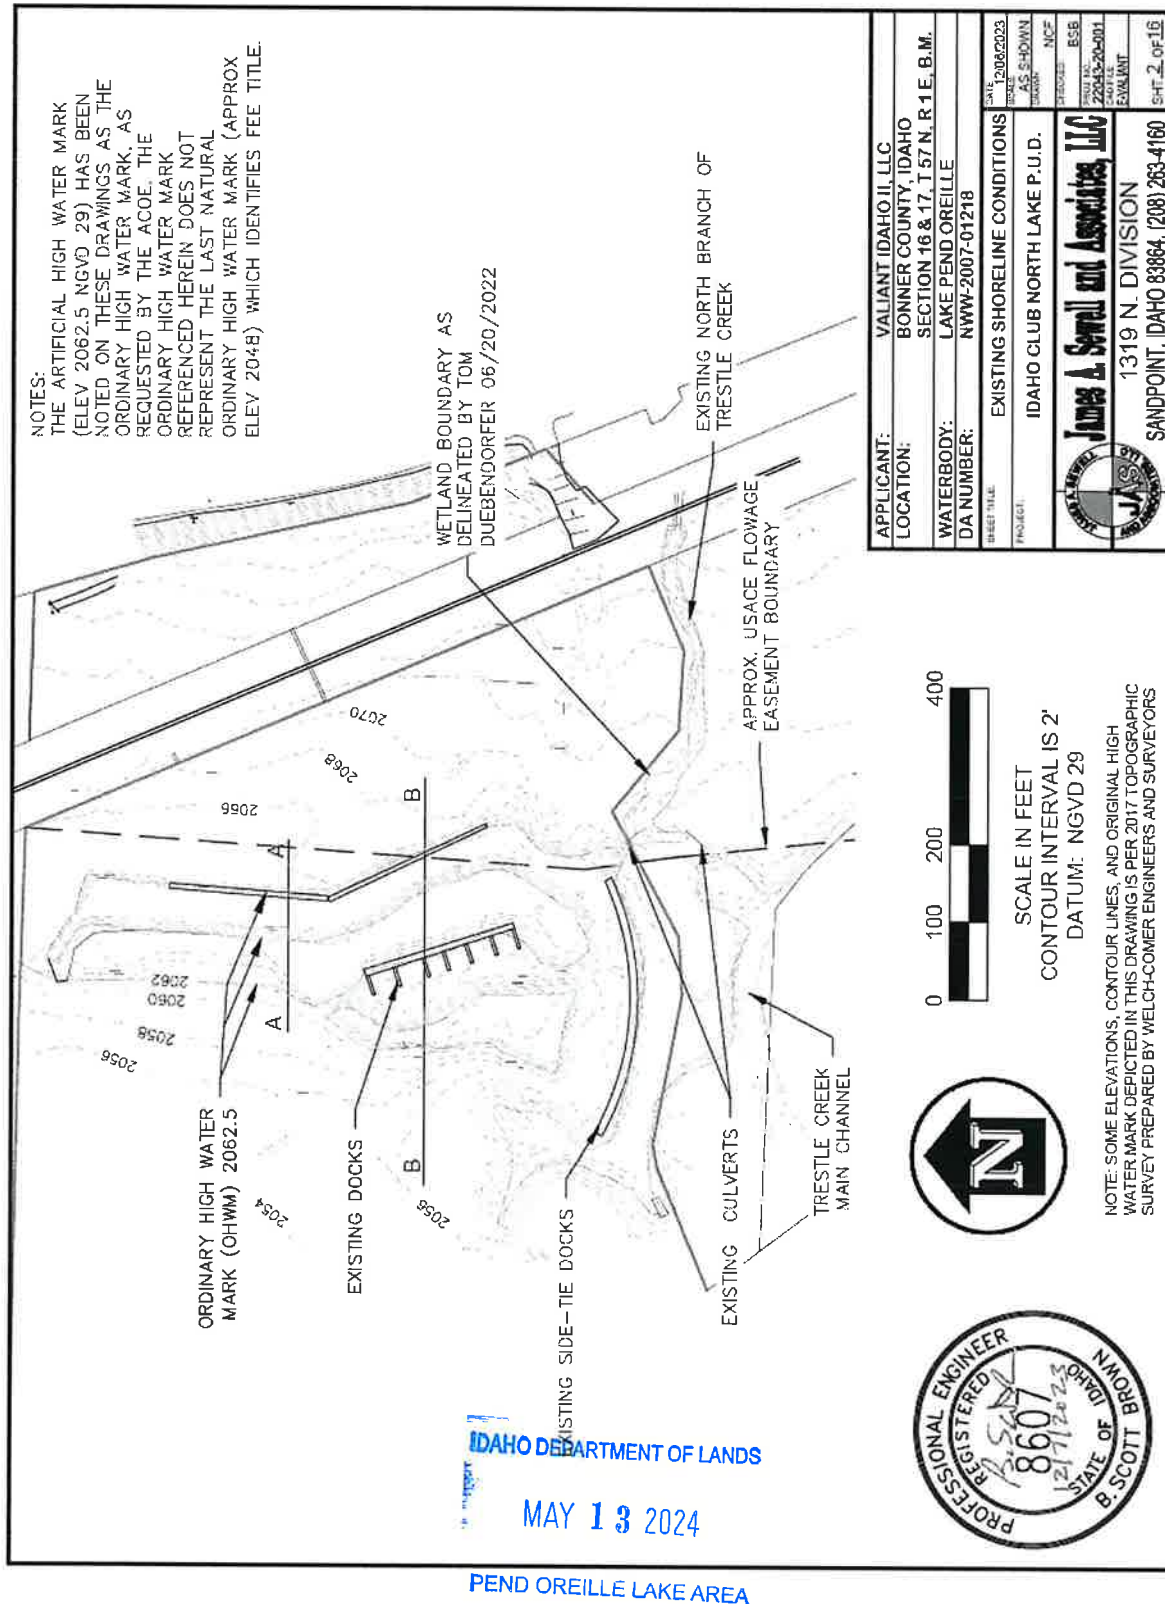


Figure 3: Engineering Drawing of Current Configuration of Site (J.A. Sewell & Associates, 2023b).

February 9th, 2024

MAY 13 2024

PEND OREILLE LAKE AREA

Figure 4: Engineering Drawing of Proposed Project Actions at Site (J.A. Sewell & Associates, 2023b).



February 9th, 2024

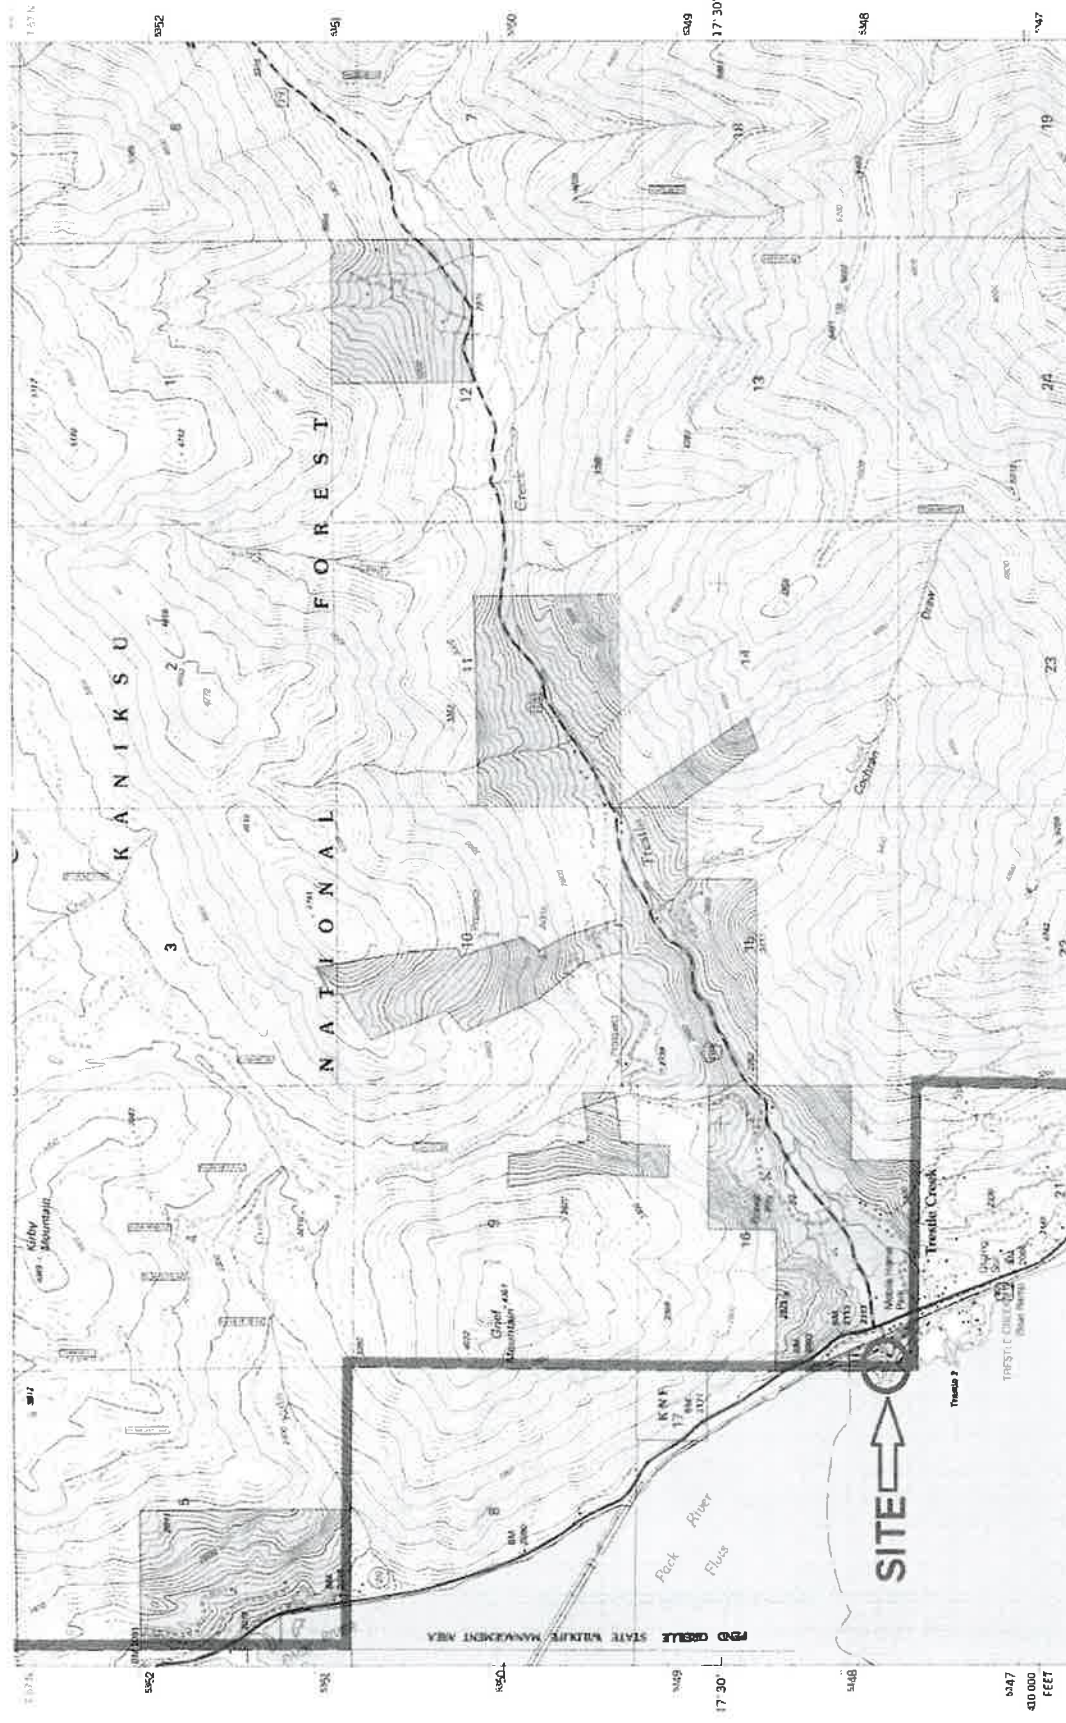


Figure 6: USGS Topographic Map of Trestle Creek Area (USGS 1996a).

February 9th, 2024



Figure 7: USGS Geologic Map of the Trestle Creek area (Miller & others, 1999).



Figure 8: Geologic Map of the lower Trestle Creek area (Reed & others, 2006). See key in Figure 9.

Prichard Formation	
Ypl	Prichard Formation, transition member (Mesoproterozoic)
Yph	Prichard Formation, member h (Mesoproterozoic)
Ypg	Prichard Formation, member g (Mesoproterozoic)
Ypi	Prichard Formation, member i (Mesoproterozoic)
Ypdy	Prichard Formation, member f quartzite (Mesoproterozoic)
Ype	Prichard Formation, member e (Mesoproterozoic)
Ypd	Prichard Formation, member d (Mesoproterozoic)
Ypi	Prichard Formation, member c (Mesoproterozoic)
Ypab	Prichard Formation, members a and b (Mesoproterozoic)
Ypm	Prichard Formation, massive unit (Mesoproterozoic)
Ypmt	Metamorphosed Prichard Formation (Mesoproterozoic)

GLACIAL AND FLOOD RELATED DEPOSITS	
Qgl	Glaciolacustrine and peat deposits (Holocene to 14,000 years)
Qgl	Glacial deposits, unsorted (Holocene)
Qgl	Alpine till deposits (Holocene)
Qgl	Till deposits (Holocene)
Qgl	Subglacial till or ice margination deposits (Holocene)
Qgl	Deposits of ground moraine (Holocene)
Qgl	Deposits of meltwater gravel, undifferentiated (Holocene)
Qgl	Channel bank deposits (Holocene)
Qgl	Outwash gravel, debris, deposits (Holocene)
Qgl	Glacial outwash deposits (Holocene to 14,000 years)
Qgl	Channel bank deposits (Holocene)
Qgl	Deposits of meltwater gravel, young (Holocene)
Qgl	Deposits of meltwater gravel, middle (Holocene)
Qgl	Deposits of meltwater gravel, old (Holocene)
Qgl	Gravel of Horseshoe Channel, young (Holocene)
Qgl	Gravel of Horseshoe Channel, middle (Holocene)
Qgl	Gravel of Horseshoe Channel, old (Holocene)
Qgl	Gravel of Horseshoe Channel, undifferentiated (Holocene)
Qgl	Gravel of Horseshoe Channel, young (Holocene)
Qgl	Gravel of Horseshoe Channel, middle (Holocene)
Qgl	Gravel of Horseshoe Channel, old (Holocene)
Qgl	Gravel of Horseshoe Channel, undifferentiated (Holocene)
Qgl	Gravel of Horseshoe Channel, young (Holocene)
Qgl	Gravel of Horseshoe Channel, middle (Holocene)
Qgl	Gravel of Horseshoe Channel, old (Holocene)
Qgl	Gravel of Horseshoe Channel, undifferentiated (Holocene)

IDAHO DEPARTMENT OF LANDS
MAY 13 2024
PEND OREILLE LAKE AREA

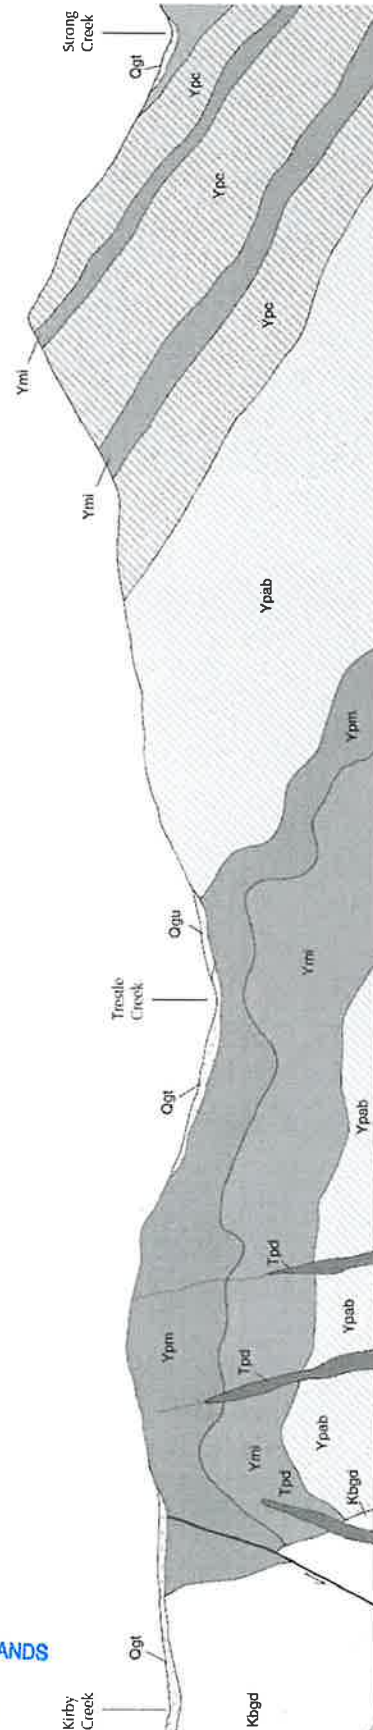


Figure 9: Geologic Cross-Section (NW-SE) across Trestle Creek drainage (Reed & others, 2006).

Form 238-7
6/07

IDAHO DEPARTMENT OF WATER RESOURCES WELL DRILLER'S REPORT

1. WELL TAG NO. D 0090671
Drilling Permit No. 96-9897 904126

Water right or injection well # _____

2. OWNER: Valiant Idaho Club

Name Valiant Idaho Club

Address 310

City Celebration State FL Zip 34747

3. WELL LOCATION:

Twp. 52 North ☒ or South ☐ Rge. 01 East ☒ or West ☐

Sec. 16 1/4 SW 1/4 SW 1/4

Gov't Lot _____ County Bonner

Lat. 48 ° 17.0040 (Deg. and Decimal minutes)

Long. -116 ° 21.1080 (Deg. and Decimal minutes)

Address of Well Site Hyw 200 And Trestle Creek

City Sandpoint

Lot _____ Blk. _____ Sub. Name _____

4. USE:
☐ Domestic ☒ Municipal ☐ Monitor ☐ Irrigation ☐ Thermal ☐ Injection
☐ Other _____

5. TYPE OF WORK:

☒ New well ☐ Replacement well ☐ Modify existing well

☐ Abandonment ☐ Other _____

6. DRILL METHOD:

☒ Air Rotary ☐ Mud Rotary ☐ Cable ☐ Other _____

7. SEALING PROCEDURES:

Seal material	From (ft)	To (ft)	Quantity (lbs or ft ³)	Placement method/procedure
Bentonite	0	60	65 lbs	grout

8. CASING/LINER:

Diameter (nominal)	From (ft)	To (ft)	Gauge/Schedule	Material	Casing	Unbr	Threaded	Welded
8"	-2	70	322	steel	☒	☐	☐	☒

Was drive shoe used? ☒ Y ☐ N Shoe Depth(s) 75

9. PERFORATIONS/SCREENS:

Perforations ☐ Y ☒ N Method _____

Manufactured screen ☒ Y ☐ N Type Allied

Method of Installation set

From (ft)	To (ft)	Slot size	Number/ft	Diameter (nominal)	Material	Gauge or Schedule
70	80	.80		7in	Stainless	Steel

Length of Headpipe _____ Length of Tailpipe _____

Packer ☒ Y ☐ N Type K

10. FILTER PACK:

Filter Material	From (ft)	To (ft)	Quantity (lbs or ft ³)	Placement method
-----------------	-----------	---------	------------------------------------	------------------

11. FLOWING ARTESIAN:

Flowing Artesian? ☐ Y ☒ N Artesian Pressure (PSIG) _____

Describe control device well cap

12. STATIC WATER LEVEL and WELL TESTS:

Depth first water encountered (ft) 50 Static water level (ft) 15

Water temp. (°F) 45 Bottom hole temp. (°F) 45

Describe access port well cap

Well test: _____ Test method: _____

Drawdown (feet)	Discharge or yield (gpm)	Test duration (minutes)	Pump	Bailer	Air	Flowing artesian
60	180	8 hours	☒	☐	☐	☐

Water quality test or comments: best - clear

13. LITHOLOGIC LOG and/or repairs or abandonment:

Bore Dia. (in)	From (ft)	To (ft)	Remarks, lithology or description of repairs or abandonment, water temp.	Water	
				Y	N
12	0	60	Surface Sand	X	
8	0	20	clay silt gravel		X
8	20	40	wet clay gravel	X	
8	40	80	long gravel, coarse sand		
			water		

RECEIVED
MAY 08 2022
IDWR/NORTH

Completed Depth (Measurable): 80

Date Started: March 8-22 Date Completed: March 9-22

14. DRILLER'S CERTIFICATION:

I/We certify that all minimum well construction standards were complied with at the time the rig was removed.

Company Name Universal Drilling Co. No. 6502

*Principal Driller Scott Hille Date Apr 1-22

*Driller Austin Hille Date Apr 1-22

*Operator II Austin Hille Date Apr 1-22

Operator I _____ Date _____

* Signature of Principal Driller and rig operator are required.

Figure 10: Drillers Geologic Well Log installed at the project site (IDWR, 2023).

IDAHO DEPARTMENT OF LANDS

MAY 13 2024

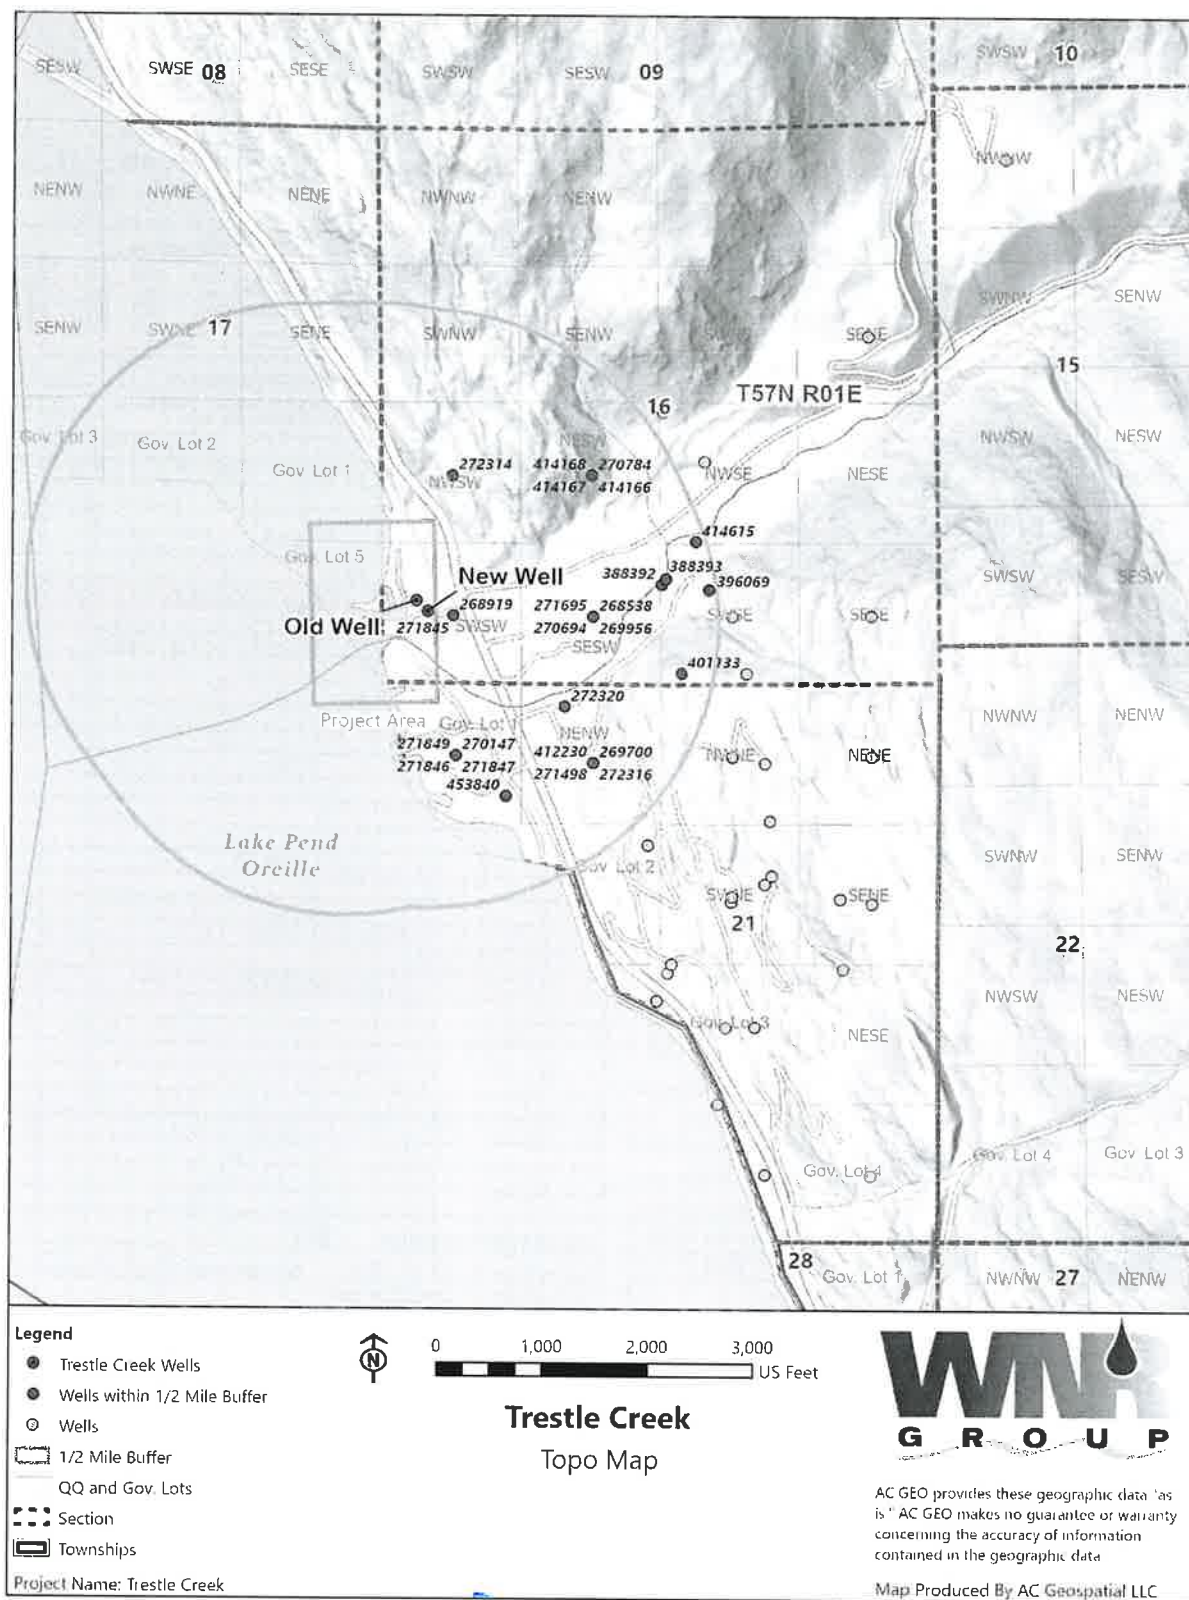


Figure 11: Groundwater Well Proximity Topographic Map Showing Wells within ½-Mile of Site. Well Logs and Figure Well Reference No. is provided in Table 2 (IDWR July 2023)

PEND OREILLE LAKE AREA

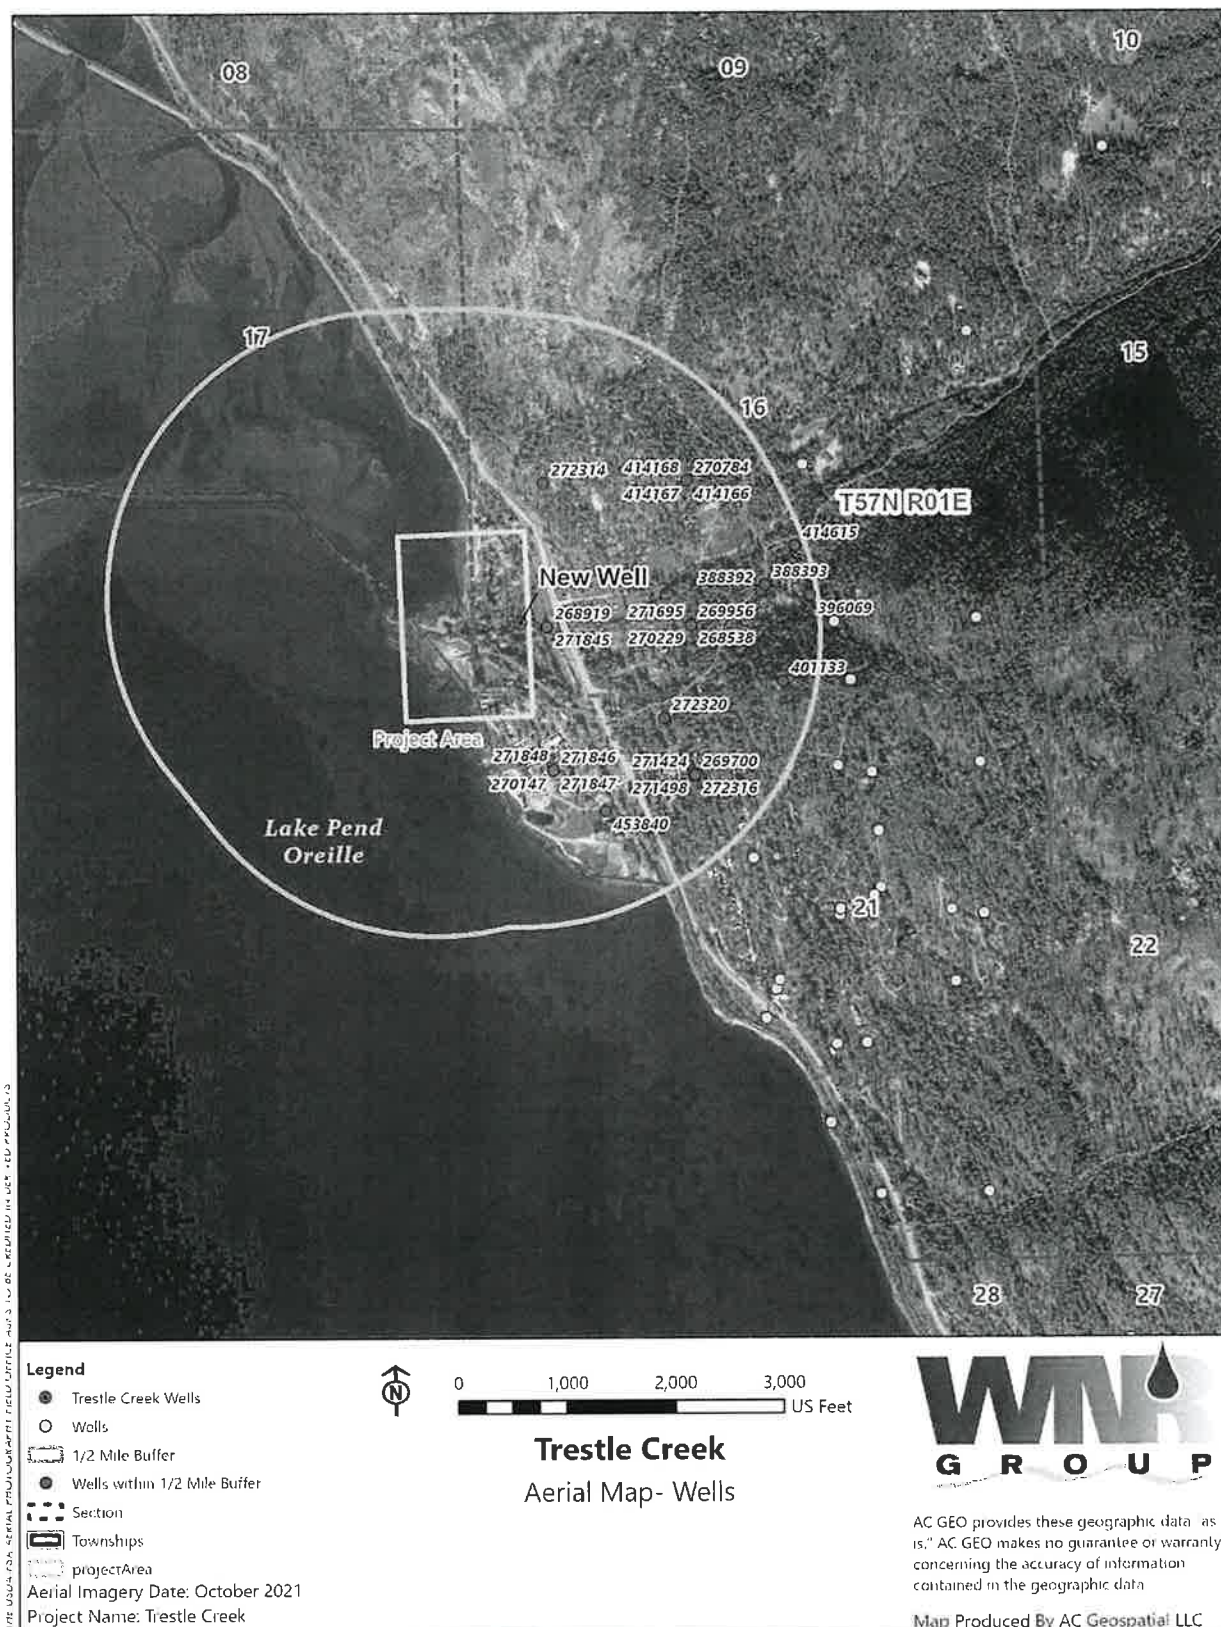


Figure 12: Groundwater Well Proximity Aerial Map Showing Wells within 1/2-Mile of Site. Well Logs and Figure Well Reference Numbers provided in Table 2 (IDWR July 2023)

MAY 13 2024

PEND OREILLE LAKE AREA

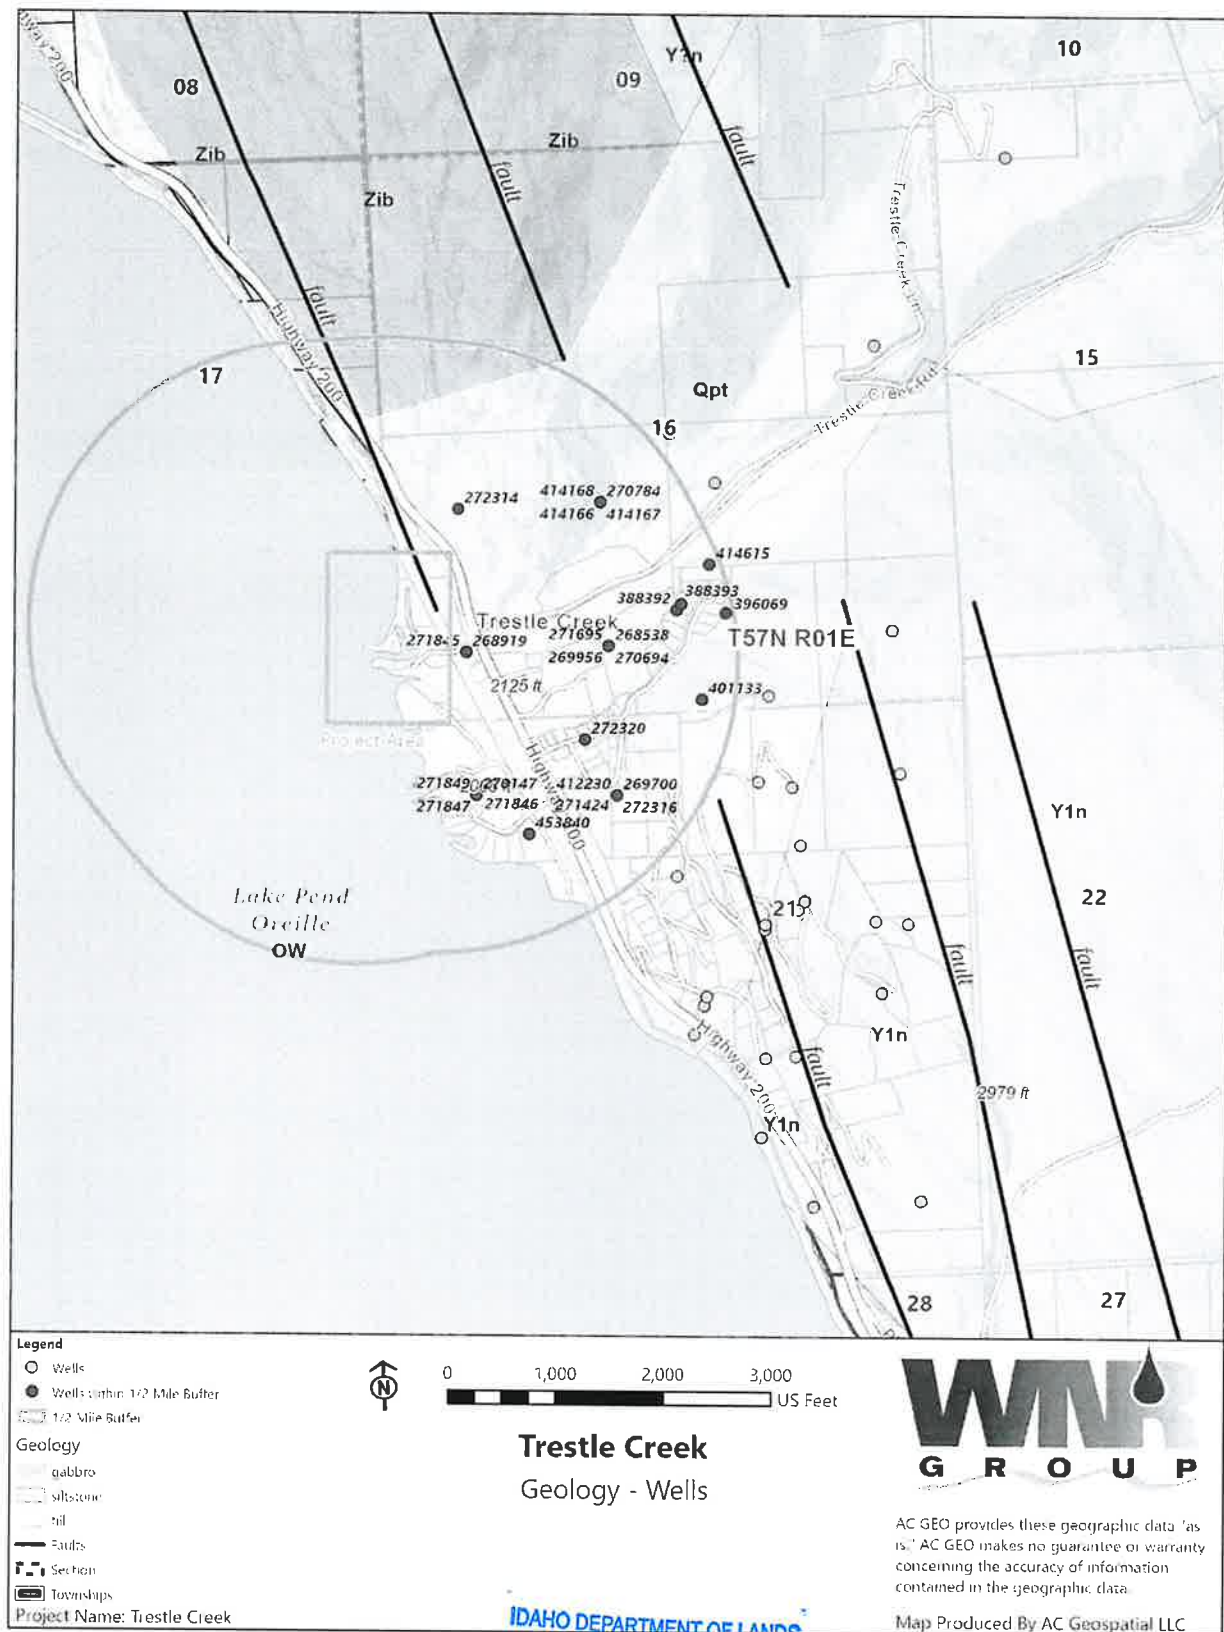


Figure 12: Groundwater Well Proximity Geologic Map Showing Wells within 1/2-Mile of Site. Well Logs and Figure Well Reference No. is provided in Table 2 (IDWR July 2023)


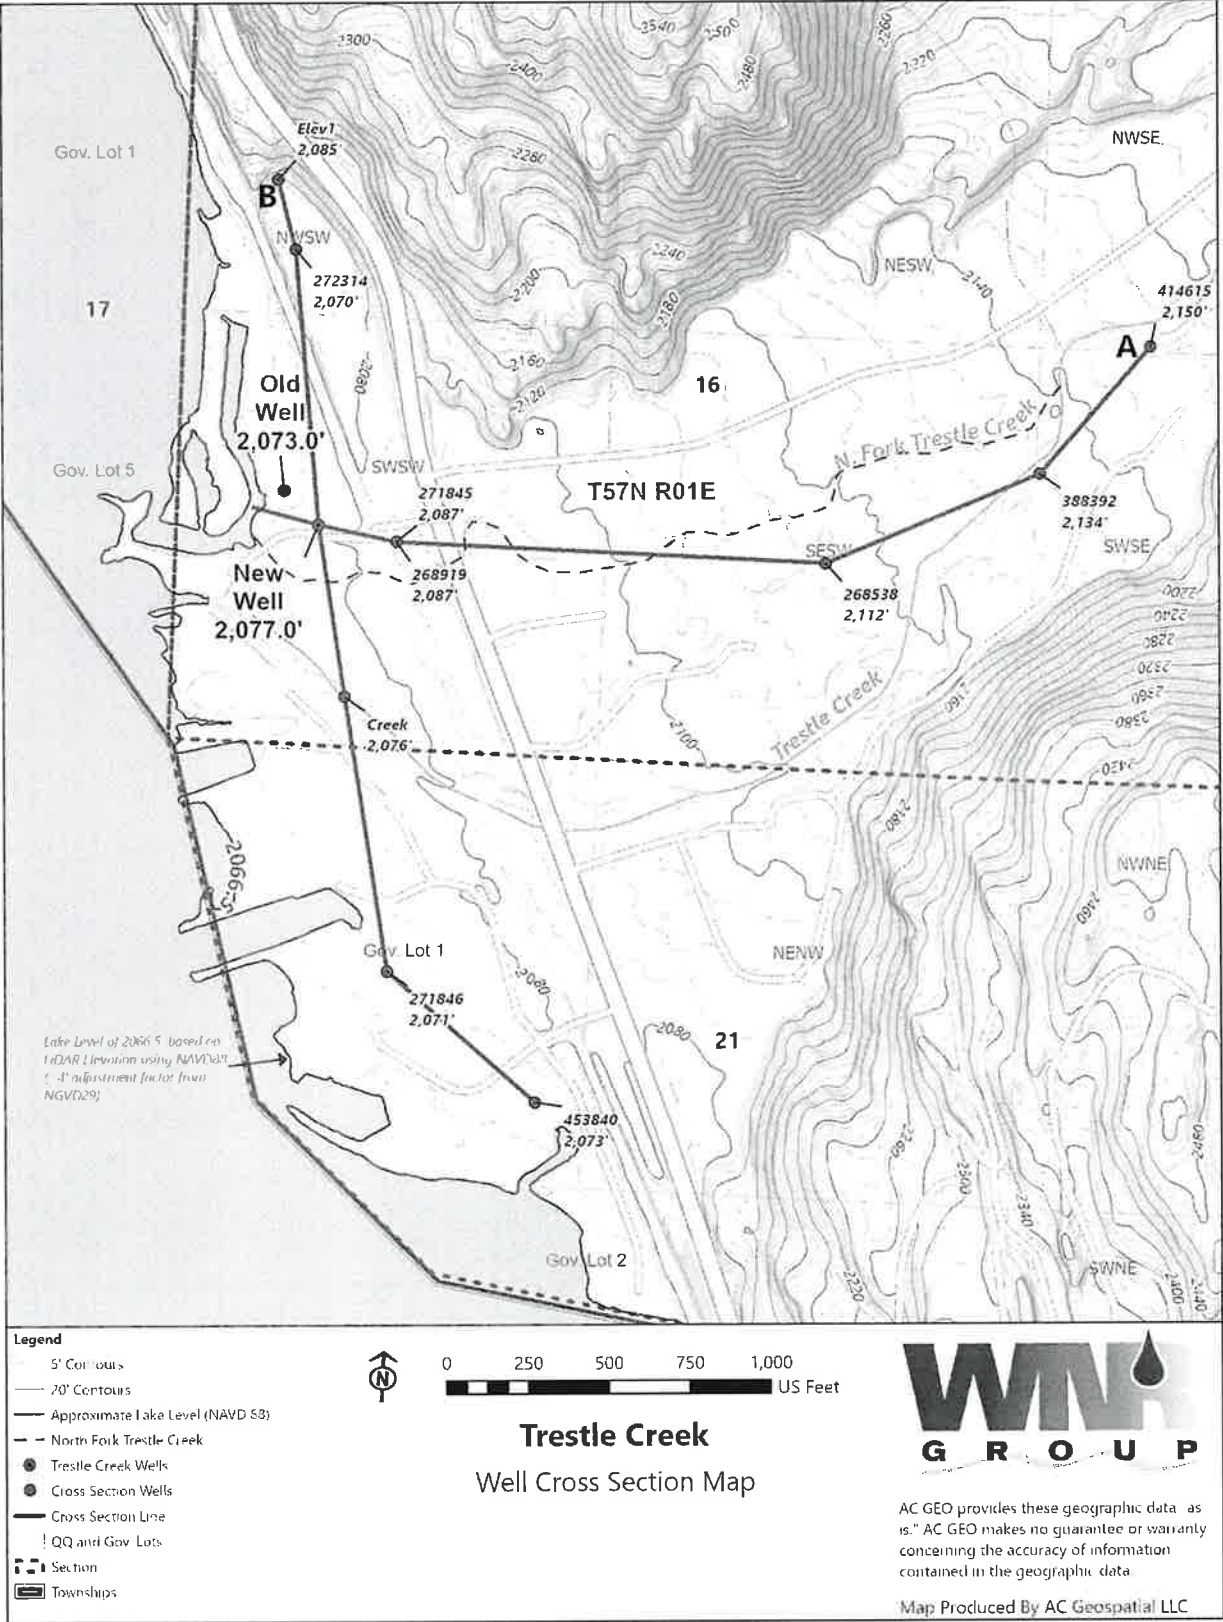


Figure 13: Map showing location of NFTC and location of Cross-sections developed for this report.

MAY 13 2024

PEND OREILLE LAKE AREA

February 9th, 2024

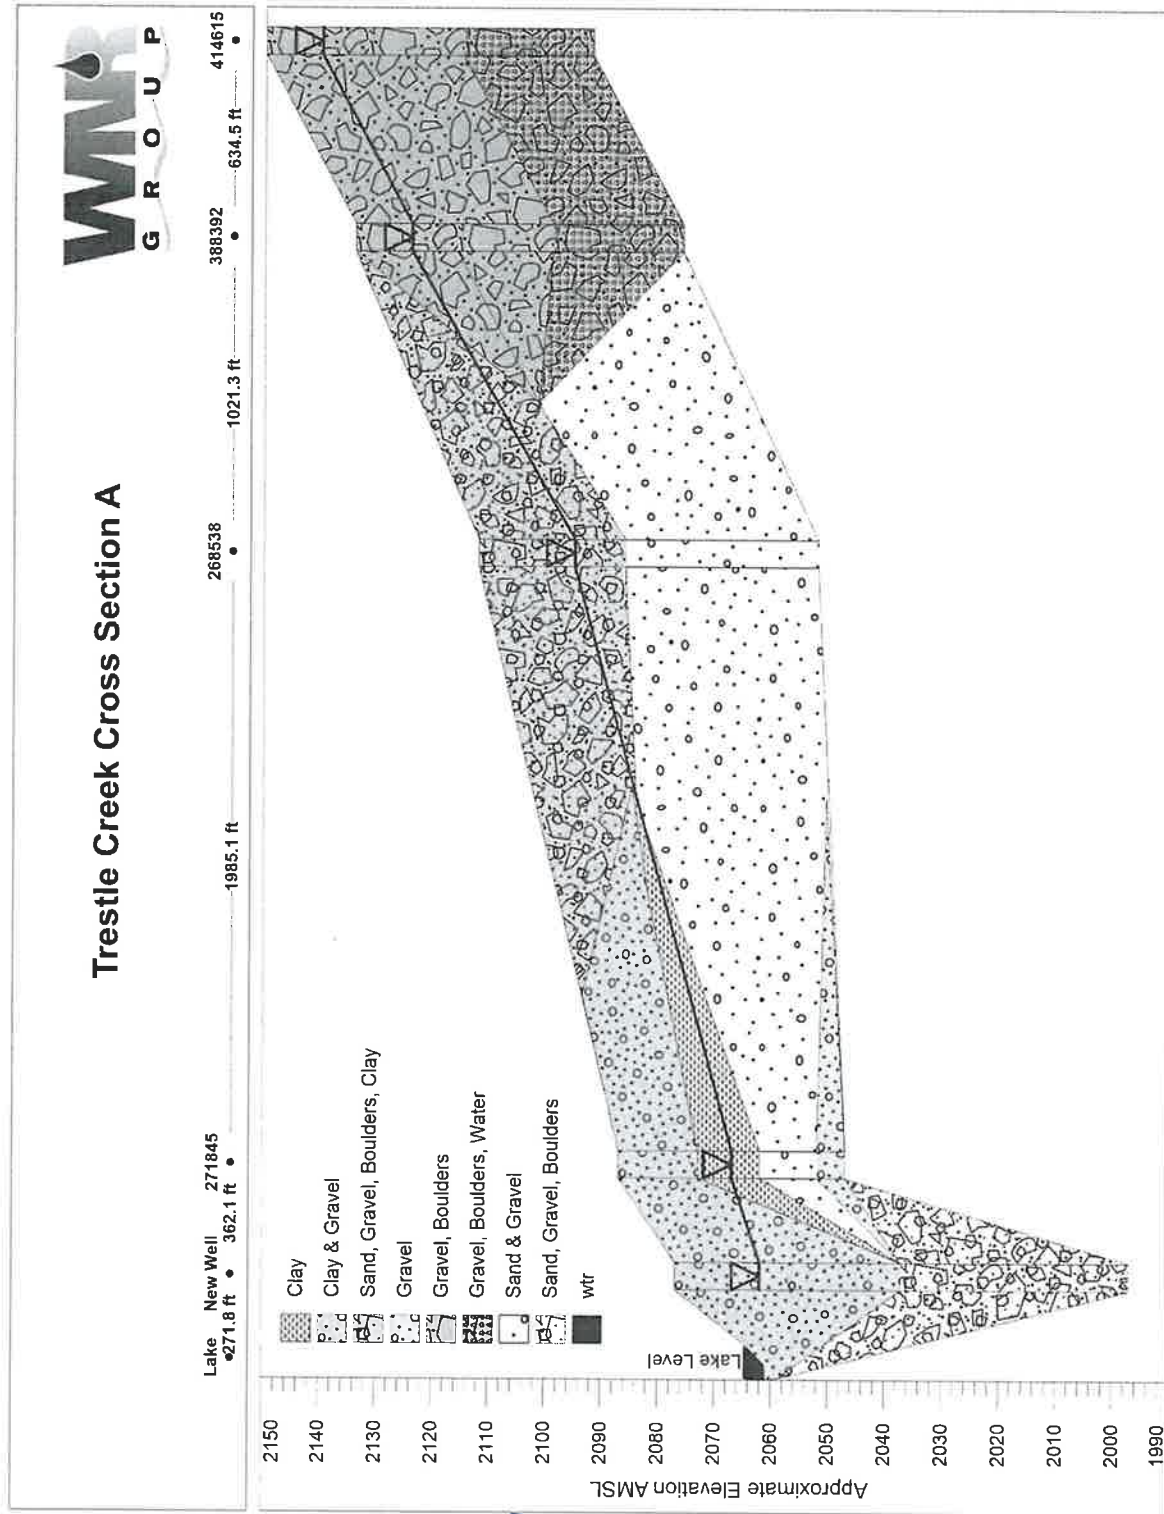

IDAHO DEPARTMENT OF LANDS

MAY 13 2024

PEND OREILLE LAKE AREA

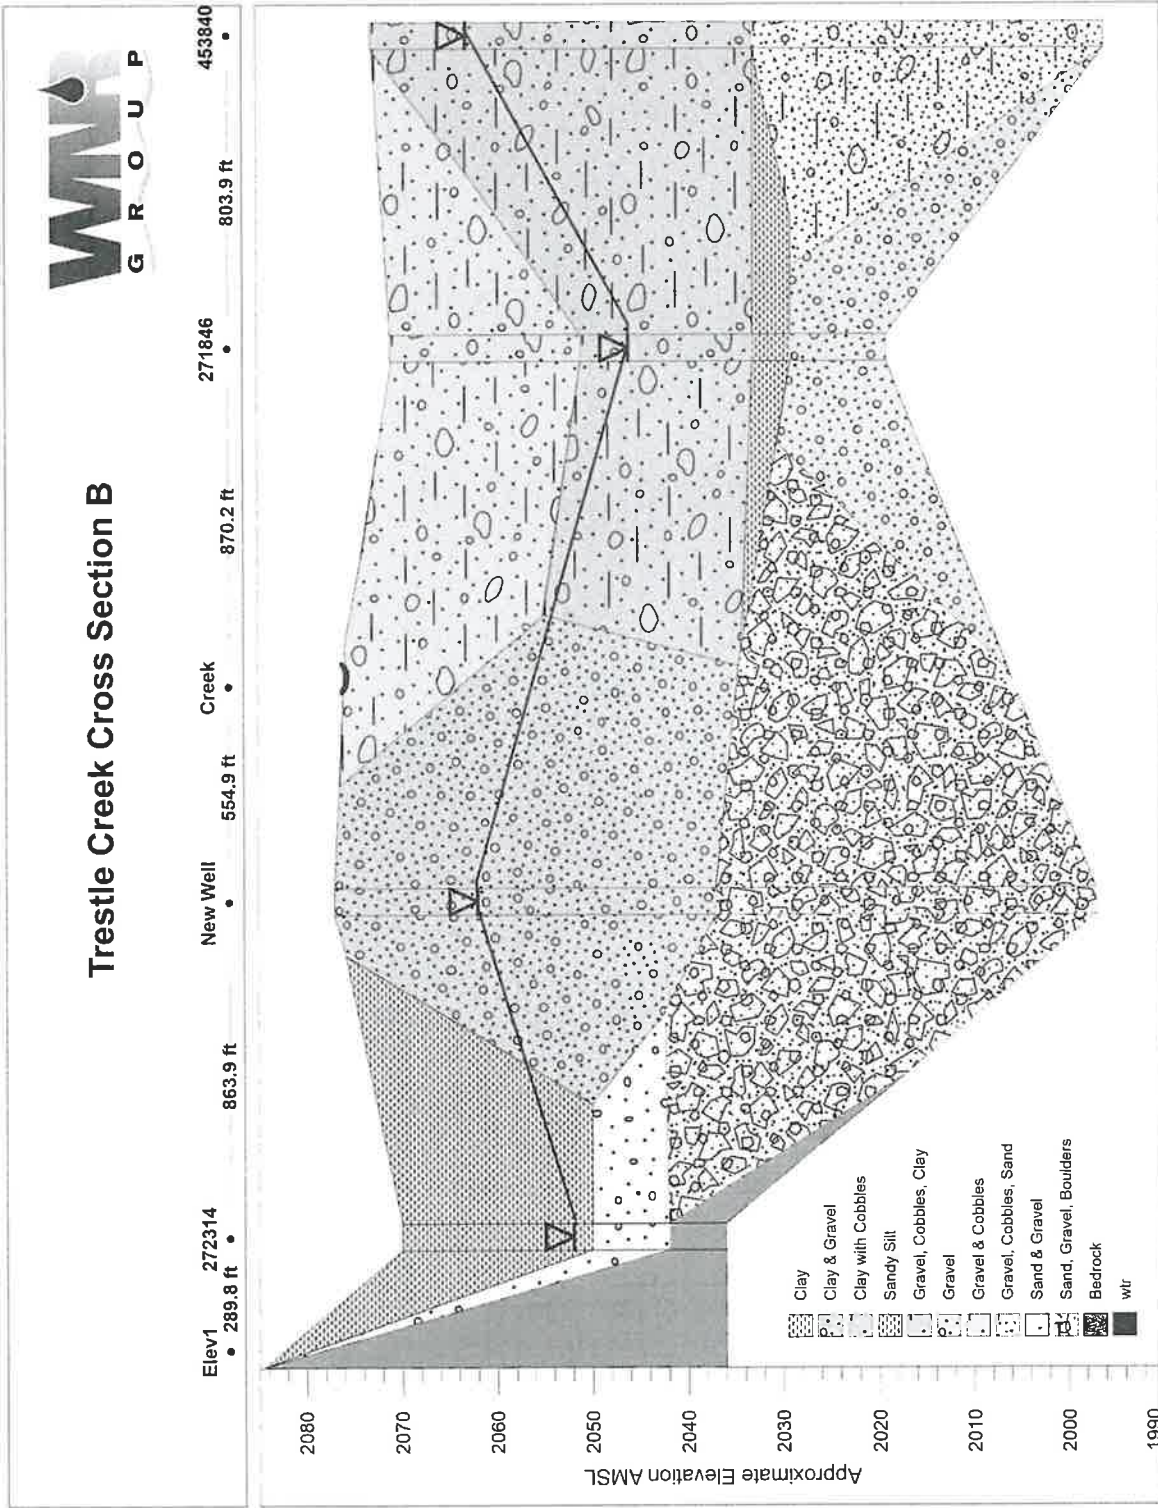


Figure 15: N-S Cross-section traversing across the lower Trestle Creek Valley. Well logs from IDWR (2023) database.

ATTACHMENT A

WELL LOGS

IDAHO DEPARTMENT OF LANDS

MAY 13 2024

PEND OREILLE LAKE AREA

IDAHO DEPARTMENT OF WATER RESOURCES
WELL DRILLER'S REPORT1. WELL TAG NO. D 0090671
Drilling Permit No. 96-9897 904126

Water right or injection well # _____

2. OWNER: Valiant Idaho ClubName Valiant Idaho ClubAddress 310City Celebration State FL Zip 34747

3. WELL LOCATION:

Twp. 52 North ☒ or South ☐ Rge. 01 East ☒ or West ☐Sec. 16 10 acres 1/4 SW 1/4 SW 1/4 160 acresGov't Lot _____ County BonnerLat. 48 ° 17.0040 (Deg. and Decimal minutes)Long. -116 ° 21.1080 (Deg. and Decimal minutes)Address of Well Site Hyw 200 And Trestle CreekCity Sandpoint

Lot _____ Blk. _____ Sub. Name _____

4. USE:

☐ Domestic ☒ Municipal ☐ Monitor ☐ Irrigation ☐ Thermal ☐ Injection
☐ Other _____

5. TYPE OF WORK:

☒ New well ☐ Replacement well ☐ Modify existing well
☐ Abandonment ☐ Other _____

6. DRILL METHOD:

☒ Air Rotary ☐ Mud Rotary ☐ Cable ☐ Other _____

7. SEALING PROCEDURES:

Seal material	From (ft)	To (ft)	Quantity (lbs or ft ³)	Placement method/procedure
Bentonite	0	60	65 lbs	pour

8. CASING/LINER:

Diameter (nominal)	From (ft)	To (ft)	Gauge/Schedule	Material	Casing	Liner	Threaded	Welded
8"	-2	70	322	steel	☒	☐	☐	☒
					☐	☐	☐	☐
					☐	☐	☐	☐
					☐	☐	☐	☐

Was drive shoe used? ☒ Y ☐ N Shoe Depth(s) 75

9. PERFORATIONS/SCREENS:

Perforations ☐ Y ☒ N Method _____Manufactured screen ☒ Y ☐ N Type AlliedMethod of installation set

From (ft)	To (ft)	Slot size	Number/ft	Diameter (nominal)	Material	Gauge or Schedule
70	80	.80		7in	Stainless	steel

Length of Headpipe _____ Length of Tailpipe _____

Packer ☒ Y ☐ N Type K

10. FILTER PACK:

Filter Material	From (ft)	To (ft)	Quantity (lbs or ft ³)	Placement method

11. FLOWING ARTESIAN:

Flowing Artesian? ☐ Y ☒ N Artesian Pressure (PSIG) _____Describe control device well cap

12. STATIC WATER LEVEL and WELL TESTS:

Depth first water encountered (ft) 50 Static water level (ft) 15Water temp. (°F) 45 Bottom hole temp. (°F) 45Describe access port well cap

Well test:

Drawdown (feet)	Discharge or yield (gpm)	Test duration (minutes)	Pump	Bailer	Air	Flowing artesian
60	180	8 hours	☒	☐	☐	☐

Test method:

Water quality test or comments: brackish - clear

13. LITHOLOGIC LOG and/or repairs or abandonment:

Bore Dia. (in)	From (ft)	To (ft)	Remarks, lithology or description of repairs or abandonment, water temp.	Water	
				Y	N
12	0	60	Surface Soil	X	
8	0	20	clay silt gravel		X
8	20	40	wet clay gravel	X	
8	40	80	large gravel, coarse sand		
			water		

RECEIVED

MAY 08 2022

IDWR/NORTH

Completed Depth (Measurable): 80Date Started: March 8-22 Date Completed: March 9-22

14. DRILLER'S CERTIFICATION:

I/We certify that all minimum well construction standards were complied with at the time the rig was removed.

Company Name Universal Drilling Co. No. 650Principal Driller Scott Hille Date April 1-22Driller Austin Hille Date Apr 1-22Operator II Austin Hille Date April 1-22

Operator I _____ Date _____

Signature of Principal Driller and rig operator are required.

IDAHO DEPARTMENT OF LANDS

MAY 13 2024

PEND OREILLE LAKE AREA

WELL DRILLER'S REPORT

State law requires that this report be filed with the Director, Department of Water Resources within 30 days after the completion or abandonment of the well.

[illegible]

FORWARD WHITE COPY TO WATER RESOURCES

WELL DRILLER'S REPORT

State law requires that this report be filed with the State Reclamation Engineer
within 30 days after completion or abandonment of the well.

ENT'D

RECEIVED
DEC 16 1969
Department of Reclamation

1. WELL OWNER

Name Fred & Rosabeth Burnside
Address Box 329 Hope Idaho
Owner's Permit No. 96-69-N-2

7. WATER LEVEL

Static water level 18 feet below land surface
Flowing? ☐ Yes ☒ No G.P.M. flow _____
Temperature _____ ° F. Quality _____
Artesian closed-in pressure _____ p.s.i.
Controlled by ☐ Valve ☐ Cap ☐ Plug

2. NATURE OF WORK

☒ New well ☐ Deepened ☐ Replacement
☐ Abandoned (describe method of abandoning)

8. WELL TEST DATA

Welled cap Pump to Burnside
By C. J. Plumbing, Inc.
☐ Pump ☒ Bailer ☐ Other

Discharge G.P.M.	Draw Down	Hours Pumped
<u>54 P.M.</u>	<u>12 ft.</u>	

3. PROPOSED USE

☒ Domestic ☐ Irrigation ☐ Test
☐ Municipal ☐ Industrial ☐ Stock

4. METHOD DRILLED

☒ Cable ☐ Rotary ☐ Dug ☐ Other

5. WELL CONSTRUCTION

Diameter of hole 6 inches Total depth 34 feet
Casing schedule: ☒ Steel ☐ Concrete

Thickness	Diameter	From	To
_____ inches	_____ inches	<u>1</u> feet	<u>32</u> feet
_____ inches	_____ inches	_____ feet	_____ feet
_____ inches	_____ inches	_____ feet	_____ feet
_____ inches	_____ inches	_____ feet	_____ feet
_____ inches	_____ inches	_____ feet	_____ feet


Was a packer or seal used? ☐ Yes ☒ No
Perforated? ☒ Yes ☐ No
How perforated? ☐ Factory ☐ Knife ☒ Torch
Size of perforation 1/2 inches by 1/2 inches

Number	From	To
_____ perforations	<u>28</u> feet	<u>32</u> feet
_____ perforations	_____ feet	_____ feet
_____ perforations	_____ feet	_____ feet

Well screen installed? ☐ Yes ☒ No
Manufacturer's name _____
Type _____ Model No. _____
Diameter _____ Slot size _____ Set from _____ feet to _____ feet
Diameter _____ Slot size _____ Set from _____ feet to _____ feetGravel packed? ☐ Yes ☒ No Size of gravel _____
Placed from _____ feet to _____ feetSurface seal? ☒ Yes ☐ No To what depth 18 feet
Material used in seal ☐ Cement grout ☒ Puddling clay

6. LOCATION OF WELL

Sketch map location must agree with written location.

County Bonner
NW 1/4 SW 1/4 Sec. 16 T. 57 N. R. 1 E

10.

Work started 12-5-69 finished 12-9-69

11. DRILLER'S CERTIFICATION

This well was drilled under my supervision and this report is
true to the best of my knowledge.Driller's or Firm's Name C. J. Plumbing & Heating, Inc. Number 178
Address Box 1, Liberty, Mont.
Signed By Donald J. McLean Date 12-13-69

WELL DRILLER'S REPORT

State law requires that this report be filed with the Director, Department of Water Resources
within 30 days after the completion or abandonment of the well.

1. WELL OWNER Name <u>Bill Freeman or Darold Sauer</u> Address <u>695 Hy 2 Hope, Id. 83836</u> Owner's Permit No. <u>applied for 96-86-N-59</u>	7. WATER LEVEL Static water level <u>24</u> feet below land surface. Flowing? ☐ Yes ☒ No G.P.M. flow _____ Artesian closed-in pressure _____ p.s.i. Controlled by: ☐ Valve ☐ Cap ☐ Plug Temperature _____ °F, Quality _____ <i>Describe artesian or temperature zones below.</i>																												
2. NATURE OF WORK ☒ New well ☐ Deepened ☐ Replacement ☐ Abandoned (describe abandonment procedures such as materials, plug depths, etc. in lithologic log)	8. WELL TEST DATA ☐ Pump ☒ Bailer ☐ Air ☐ Other _____ <table border="1"><thead><tr><th>Discharge G.P.M.</th><th>Pumping Level</th><th>Hours Pumped</th></tr></thead><tbody><tr><td><u>50</u></td><td><u>72</u></td><td><u>2</u></td></tr></tbody></table>	Discharge G.P.M.	Pumping Level	Hours Pumped	<u>50</u>	<u>72</u>	<u>2</u>																						
Discharge G.P.M.	Pumping Level	Hours Pumped																											
<u>50</u>	<u>72</u>	<u>2</u>																											
3. PROPOSED USE ☐ Domestic ☐ Irrigation ☐ Test ☐ Municipal ☐ Industrial ☐ Stock ☐ Waste Disposal or Injection ☒ Other <u>church camp</u> (specify type)	9. LITHOLOGIC LOG <table border="1"><thead><tr><th rowspan="2">Bore Diam.</th><th colspan="2">Depth</th><th rowspan="2">Material</th><th colspan="2">Water</th></tr><tr><th>From</th><th>To</th><th>Yes</th><th>No</th></tr></thead><tbody><tr><td>8</td><td>1</td><td>10</td><td>large gravel</td><td></td><td>x</td></tr><tr><td>8</td><td>10</td><td>25</td><td>cemented sand & gravel</td><td></td><td>x</td></tr><tr><td>6</td><td>25</td><td>72</td><td>brown sand</td><td>x</td><td></td></tr></tbody></table>	Bore Diam.	Depth		Material	Water		From	To	Yes	No	8	1	10	large gravel		x	8	10	25	cemented sand & gravel		x	6	25	72	brown sand	x	
Bore Diam.	Depth		Material	Water																									
	From	To		Yes	No																								
8	1	10	large gravel		x																								
8	10	25	cemented sand & gravel		x																								
6	25	72	brown sand	x																									
4. METHOD DRILLED ☐ Rotary ☐ Air ☐ Hydraulic ☐ Reverse rotary ☒ Cable ☐ Dug ☐ Other _____	RECEIVED FEB 02 1987 Department of Water Resources RECEIVED JAN 27 1987 Department of Water Resources Northern District Office IDAHO DEPARTMENT OF LANDS MAY 13 2024 PEND OREILLE LAKE AREA																												
5. WELL CONSTRUCTION Casing schedule: ☒ Steel ☐ Concrete ☐ Other _____ Thickness <u>.250</u> inches Diameter <u>6</u> inches From <u>18</u> feet To <u>62</u> feet _____ inches _____ inches _____ feet _____ feet _____ inches _____ inches _____ feet _____ feet _____ inches _____ inches _____ feet _____ feet Was casing drive shoe used? ☒ Yes ☐ No Was a packer or seal used? ☐ Yes ☒ No Perforated? ☐ Yes ☒ No How perforated? ☐ Factory ☐ Knife ☐ Torch Size of perforation _____ inches by _____ inches Number _____ From _____ To _____ _____ perforations _____ feet _____ feet _____ perforations _____ feet _____ feet _____ perforations _____ feet _____ feet Well screen installed? ☒ Yes ☐ No Manufacturer's name <u>Cook</u> Type <u>stainless steel</u> Model No. _____ Diameter <u>6</u> Slot size <u>14</u> Set from <u>62</u> feet to <u>72</u> feet Diameter _____ Slot size _____ Set from _____ feet to _____ feet Gravel packed? ☐ Yes ☒ No ☐ Size of gravel _____ Placed from _____ feet to _____ feet Surface seal depth <u>20</u> Material used in seal: ☐ Cement grout ☒ Bentonite ☐ Pudding clay ☐ _____ Sealing procedure used: ☐ Slurry pit ☒ Temp. surface casing ☐ Overbore to seal depth Method of joining casing: ☐ Threaded ☒ Welded ☐ Solvent Weld _____ ☐ Cemented between strata Describe access port <u>well cap</u>																													
6. LOCATION OF WELL Sketch map location <u>must</u> agree with written location. <table border="1"><tr><td>N</td><td></td><td></td><td></td><td></td></tr><tr><td>W</td><td></td><td></td><td></td><td>E</td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td>S</td><td></td><td></td><td></td><td></td></tr></table> County <u>Bonner</u> S. <u>SE</u> 1/4 S. <u>16</u> T. <u>57</u> N. R. <u>1</u> E. Subdivision Name _____ Lot No. _____ Block No. _____		N					W				E											S					10. Work started <u>8-13-86</u> finished <u>8-21-86</u>		
N																													
W				E																									
S																													
	11. DRILLERS CERTIFICATION <u>DD</u> I/We certify that all minimum well construction standards were complied with at the time the rig was removed. Firm Name <u>Bronson Water Wells</u> Firm No. <u>360</u> Address <u>Box 1 Spirit Lake, Id</u> Date <u>8-22-86</u> Signed by (Firm Official) <u>DD Bronson</u> and (Operator) _____																												



WELL DRILLER'S REPORT

USE TYPEWRITER OR
BALLPOINT PEN

es N 9B

[illegible]

USE ADDITIONAL SHEETS IF NECESSARY — FORWARD THE WHITE COPY TO THE DEPARTMENT

POSTED

USE ADDITIONAL SHEETS IF NECESSARY - FORWARD THE WHITE COPY TO THE DEPARTMENT

WELL DRILLER'S REPORT

State law requires that this report be filed with the State Reclamation Engineer within 30 days after completion or abandonment of the well.

NOV 12 1971

RECEIVED

[illegible]

IDAHO DEPARTMENT OF WATER RESOURCES
WELL DRILLER'S REPORT

Office Use Only
Inspected by _____
Twp _____ Rge _____ Sec _____
1/4 1/4 1/4
Lat: : : Long: : :

1. WELL TAG NO. **D D0035550**

DRILLING PERMIT NO. **DOO35550**

Other IDWR No. **825437**

2. OWNER:

Name **BILL TRUBY**

Address **113 MAIN ST**

City **SANDPOINT**

State **ID** Zip **83864**

3. LOCATION OF WELL by legal description:

Sketch map location must agree with written location.

W N

S

Twp. **57** North ☒ or South ☐
Rge. **1** East ☒ or West ☐
Sec. **16** 1/4 SE 1/4 SW 1/4
Gov't Lot _____ County **BONNER**
Lat: _____ Long: _____
Address of Well Site **TRESTLE CREEK**

(Give at least name of road + Distance to Road or Landmark)
City **HOPE**
Lt. **6** Blk. _____ Sub. Name **TRESTLE CREEK**

4. USE:

☒ Domestic ☐ Municipal ☐ Monitor ☐ Irrigation
☐ Thermal ☐ Injection ☐ Other _____

5. TYPE OF WORK: check all that apply (Replacement etc.)

☒ New Well ☐ Modify ☐ Abandonment ☐ Other _____

6. DRILL METHOD:

☒ Air Rotary ☐ Cable ☐ Mud Rotary ☐ Other _____

7. SEALING PROCEDURES:

Seal/Filter Pack			AMOUNT Sacks or Pounds	METHOD
Material	From	To		
BENTONITE	0	18	300	TEMP CASED

Was drive shoe used? ☒ Y ☐ N Shoe Depth(s) **40**

Was drive shoe seal tested? ☒ Y ☐ N How? **AIR**

8. CASING/LINER:

Diameter	From	To	Gauge	Material	Casing	Liner	Welded	Threaded
6 +11/2	40	250	STEEL	☒	☐	☒	☐	☐

Length of Headpipe _____ Length of Tailpipe _____

9. PERFORATIONS/SCREENS:

☐ Perforations Method _____
☐ Screens Screen Type _____

From	To	Slot Size	Number	Diameter	Material	Casing	Liner
						☐	☐

10. STATIC WATER LEVEL OR ARTESIAN PRESSURE:

0 ft. below ground Artesian pressure **2** lb.

Depth flow encountered **200** ft. Describe access port or control devices: **WELL CAP**

11. WELL TESTS:

☐ Pump ☐ Bailor ☒ Air ☐ Flowing Artesian

Yield gal./min.	Drawdown	Pumping Level	Time
12	200	200	1HR

Water Temp. **COLD**

Bottom hole temp. **COLD**

Water Quality test or comments: **GOOD**

Depth first Water Encounter **200**

12. LITHOLOGIC LOG: (Describe repairs or abandonment)

Bore Dia.	From	To	Remarks: Lithology, Water Quality & Temperature	Water
10	0	18	GRAVEL / BOULDER	
6	18	30	GRAVEL / BOULDER	
6	30	38	GRAVEL / BOULDER / CLAY	
6	38	200	GREY SHALE / MED HARD	
6	200	220	GREY SHALE / MED HARD / H2O	X

RECEIVED
MAY 13 2024
IDAHO DEPARTMENT OF LANDS
PEND OREILLE LAKE AREA

Completed Depth **220**

(Measurable)

Date: Started **10/15/1904**

Completed **10/21/2004**

13. DRILLER'S CERTIFICATION:

I/We certify that all minimum well construction standards were complied with at the time the rig was removed.

Company Name **MINDEN WATER WELLS, INC** Firm No. **320**

Firm Official **Edward A. Hinder** Date **10/22/2004**

and Driller or Operator **[Signature]** Date **10/22/2004**

(Sign once if Firm Official & Operator)

IDAHO DEPARTMENT OF WATER RESOURCES
WELL DRILLER'S REPORT

Office Use Only
Inspected by _____
Twp _____ Rge _____ Sec _____
1/4 1/4 1/4
Lat: _____ Long: _____

1. WELL TAG NO. **D 0046379**

DRILLING PERMIT NO. **84447**

Other IDWR No. _____

2. OWNER:

Name **BILL TRUBY**

Address **113 MAIN ST**

City **SANDPOINT**

State **ID** Zip **83864**

3. LOCATION OF WELL by legal description:

Sketch map location must agree with written location.

N
W E S
Twp. **57** North ☒ or South ☐
Rge. **1** East ☒ or West ☐
Sec. **16** 1/4 SE 1/4 SW 1/4
Gov't Lot _____
County **BONNER**
Lat: _____ Long: _____

Address of Well Site **442 CREEKSIDE LANE**

City **HOPE**

(Give at least name of road + Distance to Road or Landmark)

Lt. **8** Blk. **1** Sub. Name _____

4. USE:

☒ Domestic ☐ Municipal ☐ Monitor ☐ Irrigation
☐ Thermal ☐ Injection ☐ Other

5. TYPE OF WORK: check all that apply

(Replacement etc.)

☒ New Well ☐ Modify ☐ Abandonment ☐ Other

6. DRILL METHOD:

☒ Air Rotary ☐ Cable ☐ Mud Rotary ☐ Other

7. SEALING PROCEDURES:

Seal/Filter Pack		AMOUNT		METHOD
Material	From To	Sacks or Pounds		
BENTONITE	0 18	400#		TEPCASE

Was drive shoe used? ☒ Y ☐ N Shoe Depth(s) **58**

Was drive shoe seal tested? ☒ Y ☐ N How? **AIR**

8. CASING/LINER:

Diameter	From To	Gauge	Material	Casing	Liner	Welded	Threaded
6	+1.5 58		250STEEL	☒	☐	☒	☐

Length of Headpipe _____

Length of Tailpipe _____

9. PERFORATIONS/SCREENS:

☐ Perforations ☐ Screens
Method _____
Screen Type _____

From To	Slot Size	Number	Diameter	Material	Casing	Liner
					☐	☐

10. STATIC WATER LEVEL OR ARTESIAN PRESSURE:

10 ft. below ground Artesian pressure **N/A** lb.

Depth flow encountered **35** ft. Describe access port or control

devices: **WELL CAP**

11. WELL TESTS:

☐ Pump ☐ Bailor ☒ Air ☐ Flowing Artesian

Yield gal./min.	Drawdown	Pumping Level	Time
30	55	55	1HR

Water Temp. **COLD**

Bottom hole temp. **COLD**

Water Quality test or comments: **N/A**

Depth first Water Encounter **35**

12. LITHOLOGIC LOG: (Describe repairs or abandonment)

Bore Dia.	From	To	Remarks: Lithology, Water Quality & Temperature	Water Y	N
10	0	18	GRAVEL/BOULDERS		
6	18	35	GRAVEL/BOULDERS		
6	35	58	GRAVEL/BOULDERS/WATER	X	

RECEIVED
DEC 26 2006
IDWR/North

IDAHO DEPARTMENT OF LANDS
MAY 13 2024
PEND OREILLE LAKE AREA

Completed Depth **58** (Measurable)

Date: Started **12/15/2006**

Completed **12/15/2006**

13. DRILLER'S CERTIFICATION:

I/We certify that all minimum well construction standards were complied with at the time the rig was removed.

Company Name **MINDEN WATER WELLS, INC.** Firm No. **320**

Firm Official **Edwarda Minden** Date **12/21/2006**

and

Driller or Operator **John** Date **12/21/2006**

(Sign once if Firm Official & Operator)

57 N 1 E 16 SE SW

FORWARD WHITE COPY TO WATER RESOURCES

State law requires that this report be filed with the Director, Department of Water Resources within 30 days after the completion or abandonment of the well.

[illegible]

USE ADDITIONAL SHEETS IF NECESSARY – FORWARD THE WHITE COPY TO THE DEPARTMENT

STATE OF IDAHO
DEPARTMENT OF WATER RESOURCES
WELL DRILLER'S REPORTUSE TYPEWRITER OR
BALLPOINT PENState law requires that this report be filed with the Director, Department of Water Resources
within 30 days after the completion or abandonment of the well.

1. WELL OWNER Name <u>Roger Best</u> Address <u>298 Trailer Haven Rd. Hope, ID. 83836</u> Owner's Permit No. <u>96-90-N-8</u>	7. WATER LEVEL Static water level <u>-15</u> feet below land surface. Flowing? ☐ Yes ☒ No G.P.M. flow _____ Artesian closed-in pressure _____ p.s.i. Controlled by: ☐ Valve ☐ Cap ☐ Plug Temperature <u>44</u> °F. Quality <u>Excellent</u> Describe artesian or temperature zones below.																						
2. NATURE OF WORK ☒ New well ☐ Deepened ☐ Replacement ☐ Abandoned (describe abandonment procedures such as materials, plug depths, etc. in lithologic log)	8. WELL TEST DATA ☐ Pump ☒ Bailer ☐ Air ☐ Other _____ <table border="1"><thead><tr><th>Discharge G.P.M.</th><th>Pumping Level</th><th>Hours Pumped</th></tr></thead><tbody><tr><td><u>30</u></td><td><u>35'</u></td><td><u>1</u></td></tr></tbody></table>	Discharge G.P.M.	Pumping Level	Hours Pumped	<u>30</u>	<u>35'</u>	<u>1</u>																
Discharge G.P.M.	Pumping Level	Hours Pumped																					
<u>30</u>	<u>35'</u>	<u>1</u>																					
3. PROPOSED USE ☒ Domestic ☐ Irrigation ☐ Test ☐ Municipal ☐ Industrial ☐ Stock ☐ Waste Disposal or Injection ☐ Other _____ (specify type)	9. LITHOLOGIC LOG <table border="1"><thead><tr><th rowspan="2">Bore Diam.</th><th colspan="2">Depth</th><th rowspan="2">Material</th><th colspan="2">Water</th></tr><tr><th>From</th><th>To</th><th>Yes</th><th>No</th></tr></thead><tbody><tr><td><u>8"</u></td><td><u>+1</u></td><td><u>28</u></td><td><u>Sand, Gravel and Boulders</u></td><td><u>X</u></td><td><u>X</u></td></tr><tr><td></td><td><u>28</u></td><td><u>35</u></td><td><u>Sand/Gravel</u></td><td><u>X</u></td><td></td></tr></tbody></table>	Bore Diam.	Depth		Material	Water		From	To	Yes	No	<u>8"</u>	<u>+1</u>	<u>28</u>	<u>Sand, Gravel and Boulders</u>	<u>X</u>	<u>X</u>		<u>28</u>	<u>35</u>	<u>Sand/Gravel</u>	<u>X</u>	
Bore Diam.	Depth		Material	Water																			
	From	To		Yes	No																		
<u>8"</u>	<u>+1</u>	<u>28</u>	<u>Sand, Gravel and Boulders</u>	<u>X</u>	<u>X</u>																		
	<u>28</u>	<u>35</u>	<u>Sand/Gravel</u>	<u>X</u>																			
4. METHOD DRILLED ☐ Rotary ☐ Air ☐ Hydraulic ☐ Reverse rotary ☒ Cable ☐ Dug ☐ Other _____	RECEIVED MAR 27 1990 REGION IDWR RECEIVED APR 2 1990 Department of Water Resources 101332 IDAHO DEPARTMENT OF LANDS MAY 13 2024																						
5. WELL CONSTRUCTION Casing schedule: ☒ Steel ☐ Concrete ☐ Other _____ Thickness <u>250</u> inches Diameter <u>8</u> inches From <u>1</u> feet To <u>30</u> feet _____ inches _____ inches _____ feet _____ feet _____ inches _____ inches _____ feet _____ feet _____ inches _____ inches _____ feet _____ feet Was casing drive shoe used? ☒ Yes ☐ No Was a packer or seal used? ☐ Yes ☒ No Perforated? ☐ Yes ☒ No How perforated? ☐ Factory ☐ Knife ☐ Torch Size of perforation _____ inches by _____ inches Number _____ From _____ To _____ _____ perforations _____ feet _____ feet _____ perforations _____ feet _____ feet _____ perforations _____ feet _____ feet Well screen installed? ☒ Yes ☐ No Manufacturer's name <u>Cook</u> Type <u>Stainless Steel</u> Model No. <u>10</u> Diameter <u>8"</u> Slot size <u>20</u> Set from <u>30</u> feet to <u>35</u> feet Diameter _____ Slot size _____ Set from _____ feet to _____ feet Gravel packed? ☐ Yes ☒ No ☐ Size of gravel _____ Placed from _____ feet to _____ feet Surface seal depth <u>20</u> Material used in seal: ☐ Cement grout ☒ Bentonite ☐ Pudding clay ☐ _____ Sealing procedure used: ☐ Slurry pit ☒ Temp. surface casing ☐ Overbore to seal depth Method of joining casing: ☐ Threaded ☒ Welded ☐ Solvent Weld _____ ☐ Cemented between strata Describe access port <u>Well Seal</u>																							
6. LOCATION OF WELL Sketch map location must agree with written location <table border="1"><tr><td>N</td><td></td><td></td><td></td><td></td></tr><tr><td>W</td><td></td><td></td><td></td><td>E</td></tr><tr><td></td><td></td><td>X</td><td></td><td></td></tr></table> County <u>Bonner</u> <u>SW</u> $\frac{1}{4}$ <u>SW</u> $\frac{1}{4}$ Sec. <u>16</u> , T. <u>57</u> N., R. <u>1</u> E.		N					W				E			X			10. Work started <u>3-12-90</u> finished <u>3-20-90</u>						
N																							
W					E																		
			X																				
6. LOCATION OF WELL Sketch map location must agree with written location <table border="1"><tr><td>N</td><td></td><td></td><td></td><td></td></tr><tr><td>W</td><td></td><td></td><td></td><td>E</td></tr><tr><td></td><td></td><td>X</td><td></td><td></td></tr></table> Subdivision Name _____ Lot No. <u>Tax 10</u> Block No. _____		N					W				E			X			11. DRILLERS CERTIFICATION I/We certify that all minimum well construction standards were complied with at the time the rig was removed. Firm Name <u>Bob Pitts & Sons</u> Firm No. <u>235</u> Address <u>Sandpoint, ID</u> Date <u>3-20-90</u> Signed by (Firm Official) <u>Dale Pitts</u> and _____ (Operator) _____						
N																							
W					E																		
			X																				

WELL DRILLER'S REPORT

State law requires that this report be filed with the Director, Department of Water Administration, within 30 days after the completion or abandonment of the well.

[illegible]

USE TYPEWRITER OR
BALL POINT PEN

State of Idaho
Department of Reclamation

WELL DRILLER'S REPORT

State law requires that this report be filed with the State Reclamation Engineer
within 30 days after completion or abandonment of the well.

1. WELL OWNER
Name Wenzel
Don Wenzel
Address Hope Ida
Owner's Permit No. 96-73-N-8

7. WATER LEVEL
Static water level 25' feet below land surface
Flowing? ☐ Yes ☒ No G.P.M. flow
Temperature ° F. Quality
Artesian closed-in pressure p.s.i.
Controlled by ☐ Valve ☐ Cap ☐ Plug

2. NATURE OF WORK
☒ New well ☐ Deepened ☐ Replacement
☐ Abandoned (describe method of abandoning)

8. WELL TEST DATA Well Seal By Driller
☐ Pump ☒ Bailer ☐ Other
Discharge G.P.M. 15 RPM Draw Down 5' Hours Pumped 2 Hrs

3. PROPOSED USE
☒ Domestic ☐ Irrigation ☐ Test
☐ Municipal ☐ Industrial ☐ Stock

9. LITHOLOGIC LOG
Hole Diam. Depth From To Material Water Yes No
6" 0 20 Cobbles - clay - Gravel ✓
" 20 38 Hard sand clay w/ cobbles ✓
" 38 42 Sandy Silt ✓
" 42 52 Red Gravel w/ water ✓
" 52 Bottom of Hole

4. METHOD DRILLED
☒ Cable ☐ Rotary ☐ Dug ☐ Other

5. WELL CONSTRUCTION
Diameter of hole 6" inches Total depth 52 feet
Casing schedule: ☒ Steel ☐ Concrete
Thickness Diameter From To
0.250 inches 4.58 inches +1 feet 52 feet
_____ inches _____ inches _____ feet _____ feet
_____ inches _____ inches _____ feet _____ feet
_____ inches _____ inches _____ feet _____ feet
_____ inches _____ inches _____ feet _____ feet

Was a packer or seal used? ☐ Yes ☒ No
Perforated? ☒ Yes ☐ No
How perforated? ☐ Factory ☐ Knife ☒ Torch
Size of perforation 1/2" inches by _____ inches
Number From To
_____ perforations 48 feet 52 feet
_____ perforations _____ feet _____ feet
_____ perforations _____ feet _____ feet

Well screen installed? ☐ Yes ☒ No
Manufacturer's name _____
Type _____ Model No. _____
Diameter _____ Slot size _____ Set from _____ feet to _____ feet
Diameter _____ Slot size _____ Set from _____ feet to _____ feet

Gravel packed? ☐ Yes ☒ No Size of gravel _____
Placed from _____ feet to _____ feet

Surface seal? ☒ Yes ☐ No To what depth 18 feet
Material used in seal ☐ Cement grout ☒ Puddling clay

6. LOCATION OF WELL
Sketch map location must agree with written location.

County Bonner
Lot #1 1/4 Sec. 21 T. 57 N. R. 1 E

10. Work started 2-24-73 finished 2-25-73

11. DRILLER'S CERTIFICATION
This well was drilled under my supervision and this report is true to the best of my knowledge.
Solid Brick Drilling
Ronald L. McCracken 248
Driller's or Firm's Name Number
RT-2 Box 508 Tully Mont.
Address
Ronald L. McCracken 3-3-73
Signed By Date

USE ADDITIONAL SHEETS IF NECESSARY

FORWARD THE WHITE, BLUE, AND PINK COPIES TO THE DEPARTMENT

WELL DRILLER'S REPORT

State law requires that this report be filed with the Director, Department of Water Administration within 90 days after the completion or abandonment of the well.

1. WELL OWNER

Name John & Margaret Best
Address Hope Ida
Owner's Permit No. 96-73-N-9

2. NATURE OF WORK

☒ New well ☐ Deepened ☐ Replacement
☐ Abandoned (describe method of abandoning)

3. PROPOSED USE

☒ Domestic ☐ Irrigation ☐ Test
☐ Municipal ☐ Industrial ☐ Stock

4. METHOD DRILLED

☒ Cable ☐ Rotory ☐ Dug ☐ Other

5. WELL CONSTRUCTION

Diameter of hole _____ inches Total depth 31 feet
Casing schedule: ☒ Steel ☐ Concrete

Thickness	Diameter	From	To
<u>0.280</u> inches	<u>6.75</u> inches	<u>1</u> feet	<u>31</u> feet
_____ inches	_____ inches	_____ feet	_____ feet
_____ inches	_____ inches	_____ feet	_____ feet
_____ inches	_____ inches	_____ feet	_____ feet
_____ inches	_____ inches	_____ feet	_____ feet

Was a packer or seal used? ☐ Yes ☒ No

Perforated? ☒ Yes ☐ No

How perforated? ☐ Factory ☐ Knife ☒ Torch

Size of perforation _____ inches by _____ inches

Y * Number	From	To
2" and	27	31
perforations	feet	feet
perforations	feet	feet
perforations	feet	feet

Well screen installed? ☐ Yes ☒ No

Manufacturer's name _____

Type _____ Model No. _____

Diameter _____ Slot size _____ Set from _____ feet to _____ feet


Diameter _____ Slot size _____ Set from _____ feet to _____ feet

Gravel packed? ☐ Yes ☒ No Size of gravel _____
Placed from _____ feet to _____ feet

Surface seal? ☒ Yes ☐ No To what depth 18 feet
Material used in seal ☐ Cement grout ☒ Puddling clay

6. LOCATION OF WELL

Sketch map location must agree with written location.



County Banner
 Lot 1 1/4 Sec. 21, T. 52 N. R. 1 E. 4th

7. WATER LEVEL

Static water level 16 feet below land surface
Flowing? ☐ Yes ☒ No G.P.M. flow _____
Temperature _____ ° F. Quality _____
Artesian closed-in pressure _____ p.s.i.
Controlled by ☐ Valve ☐ Cap ☐ Plug

8. WELL TEST DATA

☐ Pump ☒ Bailer ☐ Other

Discharge G.P.M.	Draw Down	Hours Pumped
20 GPM	5'	2 hr

9. LITHOLOGIC LOG

[illegible]

10.

Work started 2-25-73 finished 2-26-73

11. DRILLER'S CERTIFICATION

This well was drilled under my supervision and this report is true to the best of my knowledge.

Gold Brick Drilling
Donald L. McEachern 248
Driller's or Firm's Name Number

AT 2 Box 508 Libby Mont
Address
Donald D. McIlracken
Signed By
Date 3-3-73

WELL DRILLER'S REPORT

State law requires that this report be filed with the Director, Department of Water Administration within 30 days after the completion or abandonment of the well.

[illegible]

USE ADDITIONAL SHEETS IF NECESSARY

FORWARD THE WHITE, BLUE, AND PINK COPIES TO THE DEPARTMENT

WELL DRILLER'S REPORT

State law requires that this report be filed with the State Reclamation Engineer within 30 days after completion or abandonment of the well. *Doc*

Q-LIN3

RECEIVED

[illegible]

USE ADDITIONAL SHEETS IF NECESSARY

STATE OF IDAHO
DEPARTMENT OF WATER RESOURCES
WELL DRILLER'S REPORTUSE TYPEWRITER OR
BALLPOINT PEN

ENT'D

State law requires that this report be filed with the Director, Department of Water Resources
within 30 days after the completion or abandonment of the well.

1. WELL OWNER Name <u>Mrs. Jim M. Daniels</u> Address <u>Box 1934 Sandpoint Idaho</u> Owner's Permit No. <u>96-84-N-86</u>	7. WATER LEVEL Static water level <u>25</u> feet below land surface. Flowing? ☐ Yes ☒ No G.P.M. flow _____ Artesian closed-in pressure _____ p.s.i. Controlled by: ☐ Valve ☐ Cap ☐ Plug Temperature <u>50</u> °F. Quality <u>clear</u> Describe artesian or temperature zones below.																												
2. NATURE OF WORK ☒ New well ☐ Deepened ☐ Replacement ☐ Abandoned (describe abandonment procedures such as materials, plug depths, etc. in lithologic log)	8. WELL TEST DATA ☐ Pump ☐ Bailor ☒ Air ☐ Other _____ Discharge G.P.M. <u>25-30</u> Pumping Level <u>9pm</u> Hours Pumped <u>air test approx</u>																												
3. PROPOSED USE ☒ Domestic ☐ Irrigation ☐ Test ☐ Municipal ☐ Industrial ☐ Stock ☐ Waste Disposal or Injection ☐ Other _____ (specify type)	9. LITHOLOGIC LOG <table border="1"><thead><tr><th rowspan="2">Bore Diam.</th><th colspan="2">Depth</th><th rowspan="2">Material</th><th colspan="2">Water</th></tr><tr><th>From</th><th>To</th><th>Yes</th><th>No</th></tr></thead><tbody><tr><td>8</td><td>0</td><td>2</td><td>top</td><td></td><td></td></tr><tr><td></td><td>2</td><td>23</td><td>clay band - gravel and boulders</td><td></td><td></td></tr><tr><td></td><td>23</td><td>43</td><td>coarse sand & gravel</td><td></td><td></td></tr></tbody></table>	Bore Diam.	Depth		Material	Water		From	To	Yes	No	8	0	2	top				2	23	clay band - gravel and boulders				23	43	coarse sand & gravel		
Bore Diam.	Depth		Material	Water																									
	From	To		Yes	No																								
8	0	2	top																										
	2	23	clay band - gravel and boulders																										
	23	43	coarse sand & gravel																										
4. METHOD DRILLED ☒ Rotary ☒ Air ☐ Hydraulic ☐ Reverse rotary ☐ Cable ☐ Dug ☐ Other _____	RECEIVED SEP 4 1984 Department of Water Resources RECEIVED AUG 28 1984 IDAHO DEPARTMENT OF LANDS MAY 13 2024 POND OREILLE LAKE AREA 004331																												
5. WELL CONSTRUCTION Casing schedule: ☒ Steel ☐ Concrete ☐ Other _____ Thickness <u>256</u> inches Diameter <u>6</u> inches + <u>1</u> feet <u>43.6</u> feet _____ inches _____ inches _____ feet _____ feet _____ inches _____ inches _____ feet _____ feet _____ inches _____ inches _____ feet _____ feet Was casing drive shoe used? ☒ Yes ☐ No Was a packer or seal used? ☐ Yes ☒ No Perforated? ☐ Yes ☒ No How perforated? ☐ Factory ☐ Knife ☐ Torch Size of perforation _____ inches by _____ inches Number _____ From _____ To _____ _____ perforations _____ feet _____ feet _____ perforations _____ feet _____ feet _____ perforations _____ feet _____ feet Well screen installed? ☐ Yes ☒ No Manufacturer's name _____ Type _____ Model No. _____ Diameter _____ Slot size _____ Set from _____ feet to _____ feet Diameter _____ Slot size _____ Set from _____ feet to _____ feet Gravel packed? ☐ Yes ☒ No ☐ Size of gravel _____ Placed from _____ feet to _____ feet Surface seal depth <u>18</u> Material used in seal: ☐ Cement grout ☒ Bentonite ☒ Puddling clay ☐ _____ Sealing procedure used: ☐ Slurry pit ☒ Temp. surface casing ☐ Overbore to seal depth Method of joining casing: ☐ Threaded ☒ Welded ☐ Solvent Weld _____ ☐ Cemented between strata Describe access port _____																													
6. LOCATION OF WELL Sketch map location must agree with written location. <table border="1"><tr><td>N</td><td></td><td></td><td></td></tr><tr><td></td><td>X</td><td></td><td></td></tr><tr><td>W</td><td></td><td></td><td>E</td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td>S</td><td></td><td></td><td></td></tr></table> County <u>Bonner</u> <u>NE 1/4 NW 1/4 Sec. 21 T. 52 N. R. 10 W.</u>		N					X			W			E													S			
N																													
	X																												
W			E																										
S																													
11. DRILLERS CERTIFICATION I/We certify that all minimum well construction standards were complied with at the time the rig was removed. Firm Name <u>Intervention</u> Firm No. <u>252</u> <u>Nt-1 Box 312 Priest River</u> Date <u>8-26-84</u> Signed by (Firm Official) <u>Norman D. Haggard</u> and (Operator) <u>Same</u>																													

WELL DRILLER'S REPORT

State law requires that this report be filed with the Director, Department of Water Administration within 30 days after the completion or abandonment of the well.

RECEIVED
MAR 10 1976

1. WELL OWNER Name <u>Paul Part</u> Address <u>Hope, Ida.</u> Owner's Permit No. <u>96-75-N-92</u>		7. WATER LEVEL Static water level <u>30</u> feet below land surface Flowing? ☐ Yes ☒ No G.P.M. flow _____ Temperature _____ ° F. Quality _____ Artesian closed-in pressure _____ p.s.i. Controlled by ☐ Valve ☐ Cap ☐ Plug																																									
2. NATURE OF WORK ☒ New well ☐ Deepened ☐ Replacement ☐ Abandoned (describe method of abandoning) _____		8. WELL TEST DATA ☐ Pump ☒ Bailer ☐ Other Discharge G.P.M. <u>150 GPM</u> Draw Down <u>6'</u> Hours Pumped <u>2</u>																																									
3. PROPOSED USE ☒ Domestic ☐ Irrigation ☐ Test ☐ Other (specify type) _____ ☐ Municipal ☐ Industrial ☐ Stock ☐ Waste Disposal or Injection		9. LITHOLOGIC LOG <table border="1"><thead><tr><th rowspan="2">Hole Diam.</th><th colspan="2">Depth</th><th rowspan="2">Material</th><th colspan="2">Water</th></tr><tr><th>From</th><th>To</th><th>Yes</th><th>No</th></tr></thead><tbody><tr><td>6"</td><td>0</td><td>8</td><td>Silt</td><td></td><td>☒</td></tr><tr><td></td><td>8</td><td>35</td><td>clay & cobbles</td><td></td><td>☒</td></tr><tr><td></td><td>35</td><td>35</td><td>fractured rock & clay sand</td><td></td><td>☒</td></tr><tr><td></td><td>35</td><td>47</td><td>silt & clay</td><td></td><td>☒</td></tr><tr><td></td><td>47</td><td>54</td><td>water sand</td><td></td><td>☒</td></tr></tbody></table>		Hole Diam.	Depth		Material	Water		From	To	Yes	No	6"	0	8	Silt		☒		8	35	clay & cobbles		☒		35	35	fractured rock & clay sand		☒		35	47	silt & clay		☒		47	54	water sand		☒
Hole Diam.	Depth		Material		Water																																						
	From	To		Yes	No																																						
6"	0	8	Silt		☒																																						
	8	35	clay & cobbles		☒																																						
	35	35	fractured rock & clay sand		☒																																						
	35	47	silt & clay		☒																																						
	47	54	water sand		☒																																						
4. METHOD DRILLED ☒ Cable ☐ Rotary ☐ Dug ☐ Other		10. Work started <u>12-18-75</u> finished <u>12-23-75</u>																																									
5. WELL CONSTRUCTION Diameter of hole <u>6</u> inches Total depth <u>54</u> feet Casing schedule: ☒ Steel ☐ Concrete Thickness <u>1 7/8</u> inches Diameter <u>6 3/8</u> inches From <u>1</u> feet To <u>54</u> feet _____ inches _____ inches _____ feet _____ feet _____ inches _____ inches _____ feet _____ feet _____ inches _____ inches _____ feet _____ feet _____ inches _____ inches _____ feet _____ feet Was a packer or seal used? ☐ Yes ☒ No Perforated? ☒ Yes ☐ No How perforated? ☐ Factory ☐ Knife ☒ Torch Size of perforation <u>1/2</u> inches by <u>1 1/2</u> inches Number <u>20</u> From <u>50</u> feet To <u>54</u> feet _____ perforations _____ feet _____ feet _____ perforations _____ feet _____ feet _____ perforations _____ feet _____ feet Well screen installed? ☐ Yes ☒ No Manufacturer's name _____ Type _____ Model No. _____ Diameter _____ Slot size _____ Set from _____ feet to _____ feet Diameter _____ Slot size _____ Set from _____ feet to _____ feet Gravel packed? ☐ Yes ☒ No Size of gravel _____ Placed from _____ feet to _____ feet Surface seal depth <u>18</u> Material used in seal ☐ Cement grout ☐ Pudding clay ☒ Well cuttings Sealing procedure used ☒ Slurry pit ☐ Temporary surface casing ☐ Overbore to seal depth		IDaho DEPARTMENT OF LANDS MAY 13 2024 PEND OREILLE LAKE AREA C03620																																									
6. LOCATION OF WELL Sketch map location must agree with written location.  Subdivision Name <u>Trousdale</u> Lot No. _____ Block No. _____ County <u>Bonner</u> <u>Ida.</u> <u>NE 1/4 NW 1/4 Sec. 31, T. 57 N. R. 1 E.</u>		11. DRILLERS CERTIFICATION Firm Name <u>Gold Creek Drilling</u> Firm No. <u>248</u> Address <u>112 E. 5th St. Hope, Ida.</u> Date <u>12-24-75</u> Signed by (Firm Official) <u>Donald S. McInnes</u> and (Operator) <u>Donald S. McInnes</u>																																									

RECEIVED

JUN 18 1976

WELL DRILLER'S REPORT

State law requires that this report be filed with the Director, Department of Water Administration within 30 days after the completion or abandonment of the well.

Department of Water Resources


1. WELL OWNER		7. WATER LEVEL																													
Name <u>Ray McGinnis</u>		Static water level <u>20</u> feet below land surface <i>MW</i>																													
Address <u>RT2 Box 260 Post Falls Idaho</u>		Flowing? ☐ Yes ☒ No G.P.M. flow _____																													
Owner's Permit No. <u>96-76-N-65</u>		Temperature _____ ° F. Quality _____																													
		Artesian closed-in pressure _____ p.s.i.																													
		Controlled by ☐ Valve ☐ Cap ☐ Plug																													
2. NATURE OF WORK		8. WELL TEST DATA																													
☒ New well ☐ Deepened ☐ Replacement		☐ Pump ☒ Bailor ☐ Other																													
☐ Abandoned (describe method of abandoning)		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 33%;">Discharge G.P.M.</th> <th style="width: 33%;">Draw Down</th> <th style="width: 33%;">Hours Pumped</th> </tr> <tr> <td><u>20</u></td> <td><u>10'</u></td> <td><u>2</u></td> </tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </table>		Discharge G.P.M.	Draw Down	Hours Pumped	<u>20</u>	<u>10'</u>	<u>2</u>																						
Discharge G.P.M.	Draw Down	Hours Pumped																													
<u>20</u>	<u>10'</u>	<u>2</u>																													
3. PROPOSED USE		9. LITHOLOGIC LOG																													
☒ Domestic ☐ Irrigation ☐ Test ☐ Other (specify type)		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th rowspan="2">Hole Diam.</th> <th colspan="2">Depth</th> <th rowspan="2">Material</th> <th colspan="2">Water</th> </tr> <tr> <th>From</th> <th>To</th> <th>Yes</th> <th>No</th> </tr> <tr> <td><u>6</u></td> <td><u>0</u></td> <td><u>20</u></td> <td><u>clay cobbles & gravel</u></td> <td> </td> <td> </td> </tr> <tr> <td></td> <td><u>20</u></td> <td><u>35</u></td> <td><u>silt & gravel</u></td> <td> </td> <td> </td> </tr> <tr> <td></td> <td><u>35</u></td> <td><u>40</u></td> <td><u>sand & gravel w/ pebbles</u></td> <td> </td> <td> </td> </tr> </table>		Hole Diam.	Depth		Material	Water		From	To	Yes	No	<u>6</u>	<u>0</u>	<u>20</u>	<u>clay cobbles & gravel</u>				<u>20</u>	<u>35</u>	<u>silt & gravel</u>				<u>35</u>	<u>40</u>	<u>sand & gravel w/ pebbles</u>		
Hole Diam.	Depth		Material		Water																										
	From	To		Yes	No																										
<u>6</u>	<u>0</u>	<u>20</u>	<u>clay cobbles & gravel</u>																												
	<u>20</u>	<u>35</u>	<u>silt & gravel</u>																												
	<u>35</u>	<u>40</u>	<u>sand & gravel w/ pebbles</u>																												
☐ Municipal ☐ Industrial ☐ Stock ☐ Waste Disposal or Injection																															
4. METHOD DRILLED																															
☒ Cable ☐ Rotary ☐ Dug ☐ Other																															
5. WELL CONSTRUCTION																															
Diameter of hole <u>6</u> inches Total depth <u>40</u> feet																															
Casing schedule: ☒ Steel ☐ Concrete																															
<table style="width: 100%;"> <tr> <th>Thickness</th> <th>Diameter</th> <th>From</th> <th>To</th> </tr> <tr> <td><u>17</u> inches</td> <td><u>6 3/8</u> inches</td> <td><u>+1</u> feet</td> <td><u>40</u> feet</td> </tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> </table>		Thickness	Diameter	From	To	<u>17</u> inches	<u>6 3/8</u> inches	<u>+1</u> feet	<u>40</u> feet																						
Thickness	Diameter	From	To																												
<u>17</u> inches	<u>6 3/8</u> inches	<u>+1</u> feet	<u>40</u> feet																												
Was a packer or seal used? ☐ Yes ☒ No																															
Perforated? ☒ Yes ☐ No																															
How perforated? ☐ Factory ☐ Knife ☒ Torch																															
Size of perforation <u>1/2 inch</u> inches by _____ inches																															
<table style="width: 100%;"> <tr> <th>Number</th> <th>From</th> <th>To</th> </tr> <tr> <td><u>24</u> perforations</td> <td><u>36</u> feet</td> <td><u>40</u> feet</td> </tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </table>		Number	From	To	<u>24</u> perforations	<u>36</u> feet	<u>40</u> feet																								
Number	From	To																													
<u>24</u> perforations	<u>36</u> feet	<u>40</u> feet																													
Well screen installed? ☐ Yes ☒ No																															
Manufacturer's name _____ Model No. _____																															
Diameter _____ Slot size _____ Set from _____ feet to _____ feet																															
Diameter _____ Slot size _____ Set from _____ feet to _____ feet																															
Gravel packed? ☐ Yes ☒ No Size of gravel _____																															
Placed from _____ feet to _____ feet																															
Surface seal depth <u>18</u> Material used in seal ☐ Cement grout																															
☐ Puddling clay ☒ Well cuttings																															
Sealing procedure used ☐ Shurry pit ☐ Temporary surface casing																															
☒ Overbore to seal depth																															
6. LOCATION OF WELL		10. Work started <u>4-25-76</u> finished <u>4-27-76</u>																													
Map location must agree with written location. <i>(96)</i>		11. DRILLERS CERTIFICATION <i>MW</i>																													
		Firm Name <u>Held Brick Muelberg</u> Firm No. <u>248</u>																													
Subdivision Name <u>Tuttle Creek</u>		Address <u>RT2 box 508 Litzky Mont</u> Date <u>5-29-76</u>																													
Lot No. _____ Block No. _____		Signed by (Firm Official) <u>Donald J. McCluskey</u>																													
County <u>Bonner Co.</u>		and (Operator) <u>Donald J. McCluskey</u>																													
NE 1/4 NW 1/4 Sec. <u>21</u> , T. <u>57</u> N. R. <u>1</u> E. <u>NB</u>																															

USE ADDITIONAL SHEETS IF NECESSARY

FORWARD THE WHITE COPY TO THE DEPARTMENT

WELL DRILLER'S REPORT

State law requires that this report be filed with the State Reclamation Engineer
within 30 days after completion or abandonment of the well.

1. WELL OWNER Name <u>Paul Black & John Meier</u> Address <u>Hope, Idaho</u> Owner's Permit No. <u>96-69-N-4</u>		7. WATER LEVEL Static water level <u>25</u> feet below land surface Flowing? ☐ Yes ☒ No G.P.M. flow _____ Temperature _____ ° F. Quality _____ Artesian closed-in pressure _____ p.s.i. Controlled by ☐ Valve ☐ Cap ☐ Plug																																															
2. NATURE OF WORK ☒ New well ☐ Deepened ☐ Replacement ☐ Abandoned (describe method of abandoning) _____		8. WELL TEST DATA ☐ Pump ☒ Bailer ☐ Other Discharge G.P.M. <u>20 MP 177</u> Draw Down <u>10'</u> Hours Pumped _____																																															
3. PROPOSED USE ☒ Domestic ☐ Irrigation ☐ Test ☐ Municipal ☐ Industrial ☐ Stock		9. LITHOLOGIC LOG <table border="1"><thead><tr><th rowspan="2">Hole Diam.</th><th colspan="2">Depth</th><th rowspan="2">Material</th><th colspan="2">Water</th></tr><tr><th>From</th><th>To</th><th>Yes</th><th>No</th></tr></thead><tbody><tr><td>6"</td><td>0</td><td>20</td><td>Gravel & Boulders</td><td></td><td></td></tr><tr><td></td><td>20</td><td>24</td><td>Boulder</td><td></td><td></td></tr><tr><td></td><td>24</td><td>35</td><td>Gravel & Boulders</td><td></td><td></td></tr><tr><td></td><td>35</td><td>45</td><td>Sand with boulders</td><td></td><td></td></tr><tr><td></td><td>45</td><td>56</td><td>Coarse sand w/ water</td><td></td><td></td></tr><tr><td></td><td>56</td><td></td><td>Bottom of hole</td><td></td><td></td></tr></tbody></table>		Hole Diam.	Depth		Material	Water		From	To	Yes	No	6"	0	20	Gravel & Boulders				20	24	Boulder				24	35	Gravel & Boulders				35	45	Sand with boulders				45	56	Coarse sand w/ water				56		Bottom of hole		
Hole Diam.	Depth		Material		Water																																												
	From	To		Yes	No																																												
6"	0	20	Gravel & Boulders																																														
	20	24	Boulder																																														
	24	35	Gravel & Boulders																																														
	35	45	Sand with boulders																																														
	45	56	Coarse sand w/ water																																														
	56		Bottom of hole																																														
4. METHOD DRILLED ☒ Cable ☐ Rotary ☐ Dug ☐ Other																																																	
5. WELL CONSTRUCTION Diameter of hole <u>6</u> inches Total depth <u>56</u> feet Casing schedule: ☐ Steel ☐ Concrete Thickness _____ Diameter _____ From _____ To _____ <u>12-50</u> inches <u>6.750</u> inches <u>10</u> feet <u>56</u> feet _____ inches _____ inches _____ feet _____ feet _____ inches _____ inches _____ feet _____ feet _____ inches _____ inches _____ feet _____ feet _____ inches _____ inches _____ feet _____ feet Was a packer or seal used? ☐ Yes ☒ No Perforated? ☐ Yes ☐ No How perforated? ☐ Factory ☐ Knife ☒ Torch Size of perforation <u>1/2</u> inches by <u>10</u> inches Number _____ From _____ To _____ _____ perforations <u>52</u> feet <u>56</u> feet _____ perforations _____ feet _____ feet _____ perforations _____ feet _____ feet Well screen installed? ☐ Yes ☒ No Manufacturer's name _____ Type _____ Model No. _____ Diameter _____ Slot size _____ Set from _____ feet to _____ feet Diameter _____ Slot size _____ Set from _____ feet to _____ feet Gravel packed? ☐ Yes ☒ No Size of gravel _____ Placed from _____ feet to _____ feet Surface seal? ☒ Yes ☐ No To what depth <u>20</u> feet Material used in seal ☐ Cement grout ☒ Puddling clay																																																	
6. LOCATION OF WELL Sketch map location must agree with written location.  <u>96</u> County <u>Bonner</u> <u>NE 1/4 NW 1/4 Sec. 24, T. 57 N., R. 1 E.</u>		10. Work started <u>10-13-69</u> finished <u>10-15-69</u>																																															
		11. DRILLER'S CERTIFICATION This well was drilled under my supervision and this report is true to the best of my knowledge. Driller's or Firm's Name <u>C. C. L. Reclamation & Construction</u> Number <u>178</u> Address <u>Don't know</u> Signed By <u>Don't know</u> Date <u>10-15-69</u>																																															

IDAHO DEPARTMENT OF WATER RESOURCES
WELL DRILLER'S REPORT

Office Use Only

Well ID No. _____

Inspected by _____

Twp _____ Rge _____ Sec _____

_____ 1/4 _____ 1/4 _____ 1/4

Lat: : : Long: : :

1. WELL TAG NO. D 0045026
 DRILLING PERMIT NO. 841974
 Water Right or Injection Well No. _____

12. WELL TESTS:

☒ Pump ☐ Bailer ☐ Air ☐ Flowing Artesian

Yield gal./min.	Drawdown	Pumping Level	Time
30	0	20	2

Water Temp. 47 Bottom hole temp. _____
Water Quality test or comments: _____

2. OWNER:

Name Dolores Poolman
Address 31 Derby Ln
City Ossining State NY Zip 10562

3. LOCATION OF WELL by legal description:

You must provide address or Lot, Blk, Sub. or Directions to well.

Twp. 57 North ☒ or South ☐
Rge. 1 East ☒ or West ☐
Sec. 21 1/4 NE 1/4 NW 1/4
Gov't Lot _____
County Banner

Lat: N48:16:835 Long: W116:20:855
Address of Well Site Trossle Creek - creek side City Sandpoint
Ln
(Give at least name of road + Distance to Road or Landmark)

Lt. _____ Blk. _____ Sub. Name _____

4. USE:

☒ Domestic ☐ Municipal ☐ Monitor ☐ Irrigation
☐ Thermal ☐ Injection ☐ Other

5. TYPE OF WORK check all that apply (Replacement etc.)
☒ New Well ☐ Modify ☐ Abandonment ☐ Other

6. DRILL METHOD:

☒ Air Rotary ☐ Cable ☐ Mud Rotary ☐ Other _____

7. SEALING PROCEDURES

Seal Material	From	To	Weight / Volume	Seal Placement Method
Bentonite	0	30	30	Temp Casting

Was drive shoe used? ☒ Y ☐ N Shoe Depth(s) 55
Was drive shoe seal tested? ☐ Y ☒ N How?

8. CASING/LINER:

Diameter	From	To	Gauge	Material	Casing	Liner	Welded	Threaded
6	11	55	280	Steel	☒	☐	☒	☐
					☐	☐	☐	☐
					☐	☐	☐	☐

Length of Headpipe _____ Length of Tailpipe _____
Packer ☐ Y ☒ N Type _____

9. PERFORATIONS/SCREENS PACKER TYPE

Perforation Method

Screen Type & Method of Installation Johnson

From	To	Slot Size	Number	Diameter	Material	Casing	Liner
55	60	35		5	stainless	☐	☒
						☐	☐
						☐	☐

10. FILTER PACK

Filter Material	From	To	Weight / Volume	Placement Method

11. STATIC WATER LEVEL OR ARTESIAN PRESSURE:

20 ft. below ground Artesian pressure _____ lb.
Depth flow encountered 55 ft. Describe access port or control devices:

Well Seal
57N 1E 21

13. LITHOLOGIC LOG: (Describe repairs or abandonment)

Water

[illegible]

Completed Depth 59' (Measurable)
Date: Started 9-5-06 Completed 9-7-06

14. DRILLER'S CERTIFICATION

I/We certify that all minimum well construction standards were complied with at the time the rig was removed.

Company Name Bob Pitts & Son Firm No. 27

Principal Driller Dale Gatto Date 9-7-06

Driller or Operator II _____ Date _____

Operator I _____ Date _____

Principal Driller and Rig Operator *Required*.
Operator I must have signature of Driller/Operator II.

IDAHO DEPARTMENT OF WATER RESOURCES
WELL DRILLER'S REPORT1. WELL TAG NO. D D0079525
Drilling Permit No. 888703

Water right or injection well #

2. OWNER: Valiant Idaho LLCName Valiant Idaho LLCAddress 310 Charleston PlCity Celebration State FL Zip 34747

3. WELL LOCATION:

Twp. 52 North ☒ or South ☐ Rge. 01 East ☒ or West ☐Sec. 21 1/4 NW 1/4 NW 1/4Gov't Lot _____ County BonnerLat 48° 16.710 (Deg. and Decimal minutes)Long. -116° 22.704 (Deg. and Decimal minutes)Address of Well Site Trailer House RoadCity Troth Creek

Lot _____ Blk. _____ Sub. Name _____

4. USE:

☒ Domestic ☐ Municipal ☐ Monitor ☐ Irrigation ☐ Thermal ☐ Injection☐ Other _____

5. TYPE OF WORK:

☒ New well ☐ Replacement well ☐ Modify existing well☐ Abandonment ☐ Other _____

6. DRILL METHOD:

☒ Air Rotary ☐ Mud Rotary ☐ Cable ☐ Other _____

7. SEALING PROCEDURES:

Seal material From (ft) To (ft) Quantity (lbs or ft³) Placement method/procedureBentonite 0 58 75 bags Hand

8. CASING/LINER:

Diameter (nominal) From (ft) To (ft) Gauge/Schedule Material Casing Unse Threaded Welded

8 1/2 -2 72 322 Steel ☒ ☐ ☐ ☒☐ ☐ ☐ ☐☐ ☐ ☐ ☐☐ ☐ ☐ ☐Was drive shoe used? ☒ Y ☐ N Shoe Depth(s) 72

9. PERFORATIONS/SCREENS:

Perforations ☐ Y ☐ N Method _____Manufactured screen ☒ Y ☐ N Type AlliedMethod of installation Set

From (ft) To (ft) Slot size Number/ft Diameter (nominal) Material Gauge or Schedule

72 77 100 _____ 7 in STEINLESS Steel☐ ☐ ☐ ☐☐ ☐ ☐ ☐☐ ☐ ☐ ☐Length of Headpipe 2 foot Length of Tailpipe _____Packer ☒ Y ☐ N Type K

10. FILTER PACK:

Filter Material From (ft) To (ft) Quantity (lbs or ft³) Placement method☐ ☐ ☐ ☐☐ ☐ ☐ ☐☐ ☐ ☐ ☐

11. FLOWING ARTESIAN:

Flowing Artesian? ☐ Y ☒ N Artesian Pressure (PSIG) _____Describe control device Well cap

12. STATIC WATER LEVEL and WELL TESTS:

Depth first water encountered (ft) 10 Static water level (ft) 10Water temp. (°F) 45 Bottom hole temp. (°F) 45Describe access port Well cap

Well test: Test method:

Drawdown (feet) Discharge or yield (gpm) Test duration (minutes) Pump Bailer Air Flowing artesian

40 150 gpm 2 hours ☐ ☐ ☒ ☐Water quality test or comments: Clear

13. LITHOLOGIC LOG and/or repairs or abandonment:

Bore Dia. (in) From (ft) To (ft) Remarks, lithology or description of repairs or abandonment, water temp. Water Y N

12 0 58 Surface soil X8 0 40 Gravel, cobble, clay X8 40 77 Gravel, cobble, sand X8 77 Water X

IDAHO DEPARTMENT OF LANDS

MAY 13 2024

PEND OREILLE LAKE AREA

RECEIVED

SEP 10 2019

IDWR / NORTH

Completed Depth (Measurable): 77 feetDate Started: Aug 15-19 Date Completed: Aug 16-19

14. DRILLER'S CERTIFICATION:

I/We certify that all minimum well construction standards were complied with at the time the rig was removed.

Company Name Universal Drilling Co. No. 650*Principal Driller Sub H.H.H. Date Aug 17-19*Driller Justin H.H.H. Date Aug 17-19*Operator II Cydon H.H.H. Date Aug 17-19

Operator I _____ Date _____

* Signature of Principal Driller and rig operator are required.

State law requires that this report be filed with the Director, Department of Water Resources within 30 days after the completion or abandonment of the well.

[illegible]

WELL DRILLER'S REPORT

State law requires that this report be filed with the State Reclamation Department within 30 days after completion or abandonment of the project.

T57N R01E Sec. 21 NWNENW

By: segbert 2012-04-02

[illegible]

WELL DRILLER'S REPORT

Office Use Only		
Inspected by		
Twp	Rge	Sec
1/4	1/4	1/4
Lat	:	Long

1. WELL TAG NO. D0039942

Drilling Permit No: 830531

Other IDWR No.

2. OWNER

Name Hatfield, Craig & Gayla

Well Number:

920

Address 208 Monte Vista Dr

City Bakersfield State CA Zip 93305

3. LOCATION OF WELL by legal description

sketch map location must agree with written location

N	

Twp. 57 ☒ North or ☐ South
Rge. 1 ☒ East or ☐ West
Sec. 21 SW 1/4 SE 1/4 1/4
Gov't Lot County BONNER
Lat: : : Long: : :
Address of Well Site Angle Creek Rd
off of Eagan Mtn Rd City Hope/Trestle Cree
(Give at least name of road + Distance to Road or Landmark)
Lt. Blk. Sub. Name

4. USE:

☒ Domestic ☐ Municipal ☐ Monitor ☐ Irrigation
☐ Thermal ☐ Injection ☐ Other

5. TYPE OF WORK check all that apply (Replacement, etc.)

☒ New Well ☐ Modify ☐ Abandonment ☐ Other

6. DRILL METHOD

☒ Air Rotary ☐ Cable ☐ Mud Rotary ☐ Other

7. SEALING PROCEDURES

SEAL/FILTER PACK			AMOUNT	METHOD
Material	From	To	Sacks or Pounds	
BENTONITE	0	18	250 lbs	Overbore

Was drive shoe used? ☒ Y ☐ N Shoe Depth(s) 18Was drive shoe seal tested? ☐ Y ☒ N How?

8. CASING/LINER:

Diameter	From	To	Gauge	Material	Casing	Liner	Welded	Threaded
4	-6	322	.160	PVC	☐	☒	☐	☐
6	+2	18	.250	Steel	☒	☐	☒	☐

Length of Headpipe Length of Tailpipe

9. PERFORATIONS/SCREENS

☒ Perforations Method Skill Saw

☐ Screens Screen Type

From	To	Slot Size	Number	Diameter	Material	Casing	Liner
306	322	1 8 X 6	50	4	PVC	☐	☒

10. STATIC WATER LEVEL OR ARTESIAN PRESSURE:

160 ft. below ground Artesian pressure lb.

Depth flow encountered 305 ft. Describe access port or control devices: Welded Cap

11. WELL TESTS:

☐ Pump ☐ Bailer ☒ Air ☐ Flowing Artesi

Yield gal./min.	Drawdown	Pumping Level	Time
7			1hr

Water Temp. Cold Bottom Hole Temp. Cold

Water Quality test or comments: Clear

Depth first Water encountered 305

12. LITHOLOGIC LOG:(Describe repairs or abandonment)

					Water	
Bore Diam	From	To	Remarks: Lithology, Water Quality, Temperature		Y	N
8	0	9	Broken Shale		☐	☒
8	9	18	Shale Grav		☐	☒
6	18	42	Shale Grav		☐	☒
6	42	50	Shale Brown		☐	☒
6	50	72	Shale Grav		☐	☒
6	72	81	Shale grav fractured		☐	☒
6	81	107	Shale Grav		☐	☒
6	107	116	Shale Brown		☐	☒
6	116	303	Shale Grav		☐	☒
6	303	317	Shale Grav		☒	☐
6	317	322	Shale Grav		☐	☒

RECEIVED
MAR 14 2005
IDWR/North

IDAHO DEPARTMENT OF LANDS

MAY 13 2024

PEND OREILLE LAKE AREA

Completed Depth 322 (Measurable)
Date: Started 3/3/2005 Completed 3/9/2005

13. DRILLER'S CERTIFICATION

I/We certify that all minimum well construction standards were complied with at the time the rig was removed.

Firm Name H2O WellService, Inc. Firm No. 448

Firm Official [Signature] Date 3-10-

and

Supervisor or Operator [Signature] Date 03/09/05
Todd Morgan (Sign Once if Firm Official and Operator)

57N 1E 21